


Certified LED Lights®

Product Data Sheet
Canopy Light



Product Overview

The selectable LED low profile canopy light is a versatile and energy-efficient lighting solution designed to meet the diverse needs of commercial and outdoor covered applications such as parking garages, walkways, entryways, gas stations, and building overhangs.

Featuring field-selectable wattage options of 40W, 60W, and 70W, this fixture allows installers to adjust light output to match specific mounting heights and illumination requirements, reducing energy consumption while maintaining optimal brightness.

In addition, the selectable color temperature settings of 3000K, 4000K, and 5000K provide flexibility to create warm, neutral, or daylight lighting environments, ensuring the right ambiance and visibility for any location. Engineered with high-efficiency LED technology, the canopy light delivers consistent, uniform illumination with excellent lumen performance and reduced maintenance compared to traditional HID or fluorescent fixtures.

Its durable construction is designed to withstand demanding environments, offering reliable operation and long service life. Easy to install in both new construction and retrofit projects, this canopy light combines adaptability, performance, and efficiency in one compact fixture, and it is backed by a 5-year warranty for dependable, worry-free operation.

Applications



**Parking
Structures**



**Convenient
Stores**



Gas Stations



General area

Main Features

- * Color temperature tunable : 3K, 4K and 5K
- * Philips Lumileds 2835
- * Wattage selectable: 40W / 60W / 70W
- * Lumens: 116 to 120 Lm/W
- * 4,640 to 8,400 lumen
- * Universal 100-277V AC input voltage
- * Dimmable with 0-10V
- * 140 degrees beam angle
- * Light fixture and finish endurance tested to withstand 3000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- * Die Cast aluminium housing with durable dark bronze powder coat paint. Clear stripped PC diffuser
- * High efficiency LED Driver
- * Power factor > 0.90
- * Total harmonic distortion <20%
- * Color rendering Index >80

Product Warranty



Highlights and Certifications



ETL listed



Wet Location



DLC Listed



Dimmable
0-10V


Key Specifications

- * ETL Listed
- * DLC Listed
- * Wet location rated
- * 5-year warranty on all electronics and housing
- * -40°F to 104°F operating temperature.

Lumen Performance

40 Watts				60 Watts				70 Watts			
Color	3,000K	4,000K	5,000K	Color	3,000K	4,000K	5,000K	Color	3,000K	4,000K	5,000K
Lumens	4,640	4,800	4,720	Lumens	6,960	7,200	7,080	Lumens	8,120	8,400	8,260
Lumens / Watt	116	120	118	Lumens / Watt	116	120	118	Lumens / Watt	116	120	118

Dimensions

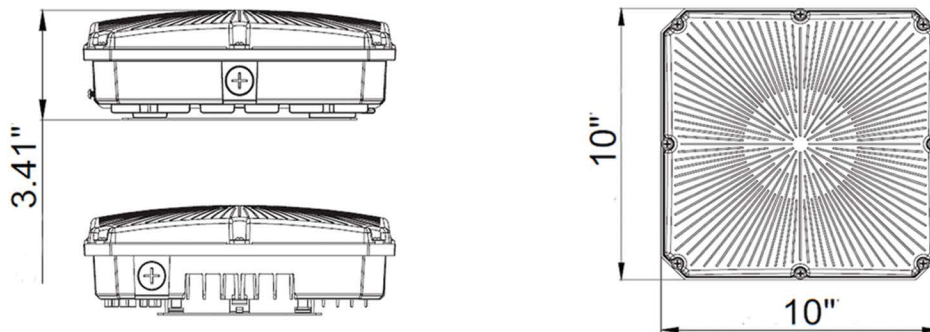

Ordering Guide

PART #	CCT Color Temp	Lumens	Lumen / Watt	Wattage Selectable
GCP1070-70W-C-H-TCP	3,000K, 4,000K, 5,000K	4,640 to 8,400	116-120	40W, 60W, 70W