



Certified LED Lights®

STANDARD



APPLICATIONS

The CLL-TPL4 is a surface-mounted LED light available in 4 and 8 ft, designed to prevent the intrusion of moisture and dust. It provides general ambient lighting in commercial and industrial settings, and is the perfect choice for both new construction and retrofits. This high-efficacy light provides long-life and uniform illumination, as well as standard 0-10vdc dimming capability. Input voltage 120-277V models. Tunable 3-CCT (3500K, 4000K, 5000K) and Tunable 3-Wattage (4-FT, 30W, 40W, 50W) or (8-FT, 50W, 60W, 70W).

FEATURES

- * Color temperature : Tunable CCT 35K, 4K and 5K
- * Wattage selectable 4 ft: 30W, 40W and 50W
- * Wattage selectable 8 ft: 50W, 60W and 70W
- * Lumens per watt: 140 Lm/W
- * Lumens 4 ft: 4200 (30W), 5600 (40W), 7000 (50W)
- * Lumens 8 ft: 7000 (50W), 8400 (60W), 9800 (70W)
- * Long-life LEDs provide 100,000 hours of operation
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Suitable for wet locations. IP 66 rated
- * Power factor > 0.90
- * Beam Angle: 120 degrees
- * Color rendering index > 80
- * Working temperature: -40 F +113 F
- * Anti-UV frosted prismatic polycarbonate lens




WARRANTY & DETAILS

- * UL Listed Passes
- * FCC class A
- * DLC premium Listed
- * 5-year warranty of all electronics and housing

DIMENSIONS

L: 47.24" in 4 ft - 94.48" in 8 ft
H: 3.46" - W: 4.33"

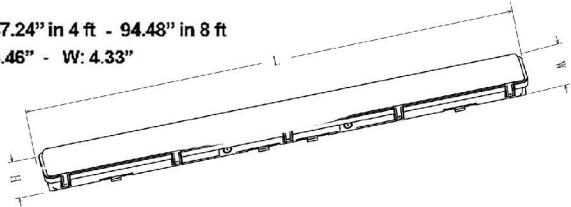

ACCESSORIES (sold separately)

- * BLD-CM20N-8W Emergency back-up - 4 Ft
- * BLD-CM20N-15W Emergency back-up - 8 Ft

MOUNTING


- * Aluminum Surface Mount clips standard. Optional 10-FT Aircraft Cables for hanging available (sold separately)

ORDERING INFORMATION

MODEL	Color Temp	Lumens	Lumen/watt	Wattage
CLL-TPL4-304050W27-3545K	CCT: 35K, 4K,5K	4200, 5600, 7000	140	30;40;50W
CLL-TPL4-506070W27-3545K	CCT: 35K, 4K,5K	7000, 8400, 9800	140	50;60;70W

PHOTOMETRIC DATA

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

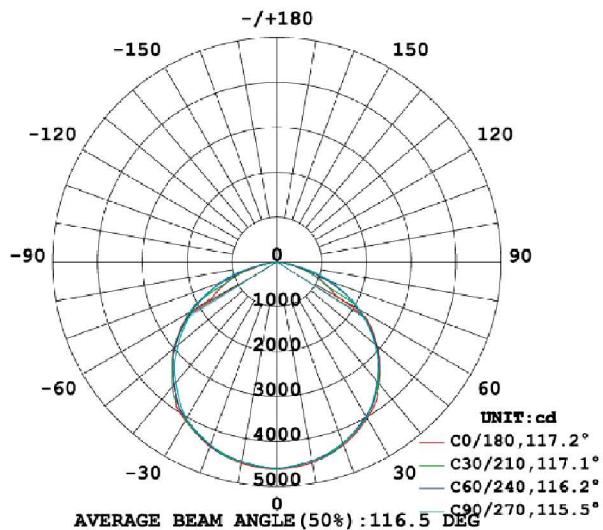

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

MH (m)

