



STANDARD



APPLICATIONS

The TFX2 series emergency light is ideal for wet location areas. It features energy-efficient LED lighting and comes standard with remote capability. The TFX2 provides a minimum of 90min of illumination during an emergency.

FEATURES

- Sealed and gasketed weather proof lamp heads with high performance chrome-plated metallized reflector and tempered glass lenses for optimal light distribution
- Adjustable long lasting, efficient, ultra bright white LED lamp heads
- 1.875 watt (15 LEDs x 0.125) per head
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Dual 120/277 voltage standard
- Remote capacity of 3.7 watt standard in operating temperatures of 32° F – 122°F
- 9.6V long life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90 minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in grey finish

HOUSING

- Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in grey finish
- Sealed and gasketed housing with hinged cover
- Sealed test switch


WARRANTY / LISTING

- Five year warranty on all electronics and housing
- Battery prorated for five years
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (-4°F – 122°F)
- CEC: Certified to CEC under Title 20 Regulations

MOUNTING

- External mounting brackets for simplified surface mounting
- Knockout for conduit applications

DIMENSIONS

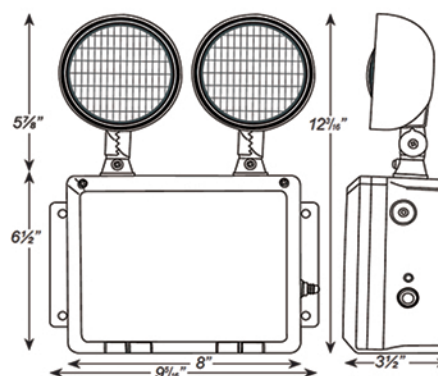

ORDERING INFORMATION

PART #	Housing Color
DTH-TFX2	Gray