

PMPF STRAIGHT SQUARE STEEL POLES



The D-TEC LED straight square steel poles are built from high strength steel tube.

Specifications and Features:

Finish: Textured architectural bronze powder coat finish, baked to ensure maximum paint adhesion, hardness and durability.

Anchor Bolts: Anchor bolts and template are included.

Hand Hole: Cast iron reinforced hand hole and cover with grounding screw.

Pole Length: 20, 25 and 30 feet

**Available in
20,25,30 feet**

**Galvanized
inside + out**

MOUNTING OPTIONS

Standard length poles include rubber fitted pole cap, side drilled 4@90 degrees and hole plugs for unused drilling locations.


Our standard equipment includes a pole cap / plastic rain cover

If tenon installation is needed, VT4 and VT5 tenon adapters available (sold separately)

WARRANTY

7-Year warranty

ORDERING INFORMATION

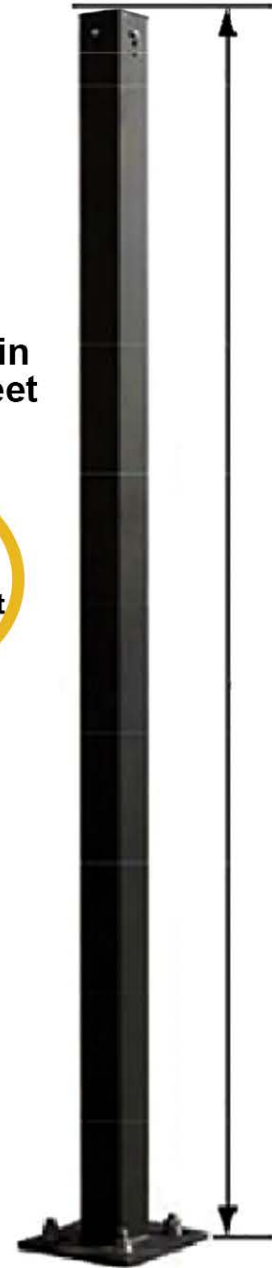



ITEM #	Height	Wall thickness	Shaft base
PMPF-20FT4-11GA-BNZ	20 Ft	11 gauge	4x4 in
PMPF-25FT4-11GA-BNZ	25 Ft	11 gauge	4x4 in
PMPF-30FT5-11GA-BNZ	30 Ft	11 gauge	5x5 in

PMPF STRAIGHT SQUARE STEEL POLES

EPA DATA

ITEM #	Max Loading Capacities (1.3 Gust Factor)					
	80 (mph)		90 (mph)		100 (mph)	
	EPA (ft2)	Wt. (lbs)	EPA (ft2)	Wt. (lbs)	EPA (ft2)	Wt. (lbs)
PMPF-20FT4-11GA-BNZ	9.8	245	7.3	182	5.3	132
PMPF-25FT4-11GA-BNZ	5.8	145	3.4	85	1.8	45
PMPF-30FT5-11GA-BNZ	6.1	152	2.4	60	-	-

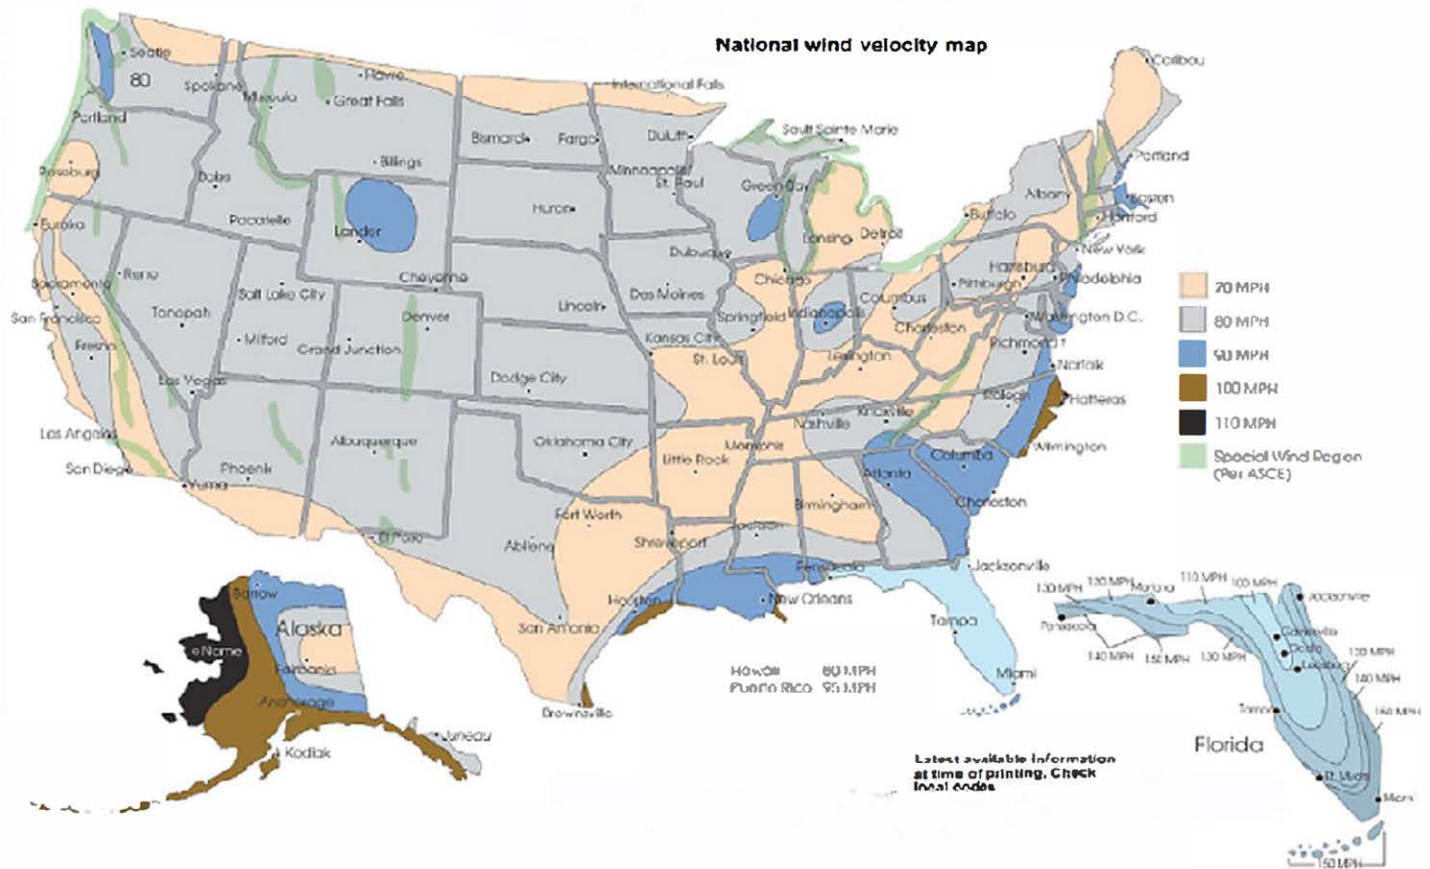

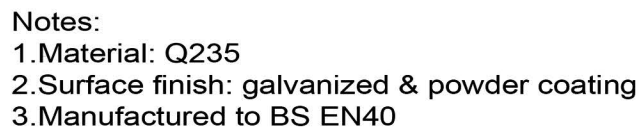

30 FT DIMENSIONS

