



Certified LED Lights®

STANDARD



The CLL-UHB is a premium round LED UFO High Bay light. It is designed to illuminate a wide variety of settings including commercial, industrial and retail settings such as warehouses, manufacturing plants, sporting venues and big-box retailers. Standard die cast aluminum housing and clear PC lens, the CLL-UHB provides durability and high performance. Standard with sensor receptacle built in for easy install control options, sensor sold separately.

FEATURES

- * 150W, 200W and 240W are standard in 5000K color temp
- * CLL-UHB-CCT is color selectable 35K, 4K and 5K and wattage selectable 150W, 200W, 240W
- * Universal 100-277V AC input voltage is standard
- * 150 Lumen / watt
- * Premium Fahold driver
- * Beam angle: 110 degrees
- * 0 -10 V dimming driver standard
- * Power factor > 0.90.
- * Total harmonic distortion <20%.
- * Color rendering Index >80.
- * Die cast aluminum housing, painted black.
- * Easy installation in new construction or retrofit.




Easy field install motion sensor available

WARRANTY & LISTING


- * UL listed
- * DLC premium Listed
- * IP65 "wet location" rated
- * Flicker free per IEEE 1789-2015 (no observable adverse effects of flicker at 100% light output level)
- * 5-year warranty on all electronics and housing

DIMENSIONS

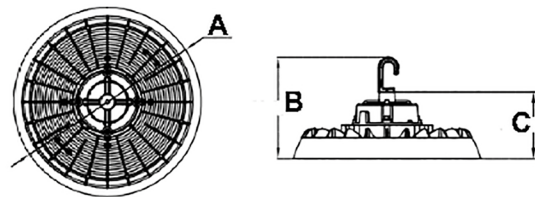

MOUNTING OPTIONS

- * Suspension from pre-installed mounting hook with locking set screw is standard.




ORDERING INFORMATION

| PART # | Watt | Lumens per watt | Color Temp | Lumens | Options (order separately) | Dimensions | | | |
|--------------|--------------------|-----------------|---------------|---------------|---------------------------------|------------|-----|------|--|
| | | | | | | A | B | C | |
| CLL-UHB-150W | 150 | 150 | 5000 | 22500 | Battery pack: EMUFO-40170-YY | 11.8" | 7.2 | 4.7" | |
| CLL-UHB-200W | 200 | 150 | 5000 | 29000 | | 12.8" | 7.3 | 4.8 | |
| CLL-UHB-240W | 240 | 150 | 5000 | 36000 | Motion sensor CLL-UHB-MS | 13.8" | 7.4 | 4.9" | |
| CLL-UHB-CCT | 150 | 140 | 35K,4K,5K CCT | 21000 | Battery pack: EMUFO-40170-YY | 13.8" | 7.4 | 4.9" | |
| | Wattage selectable | 200 | 150 | 35K,4K,5K CCT | 30000 | | | | |
| | 240 | 150 | 35K,4K,5K CCT | 36000 | Motion sensor CLL-UHB-MS | | | | |

PHOTOMETRIC DATA

UFO 240W FIXED 5000K

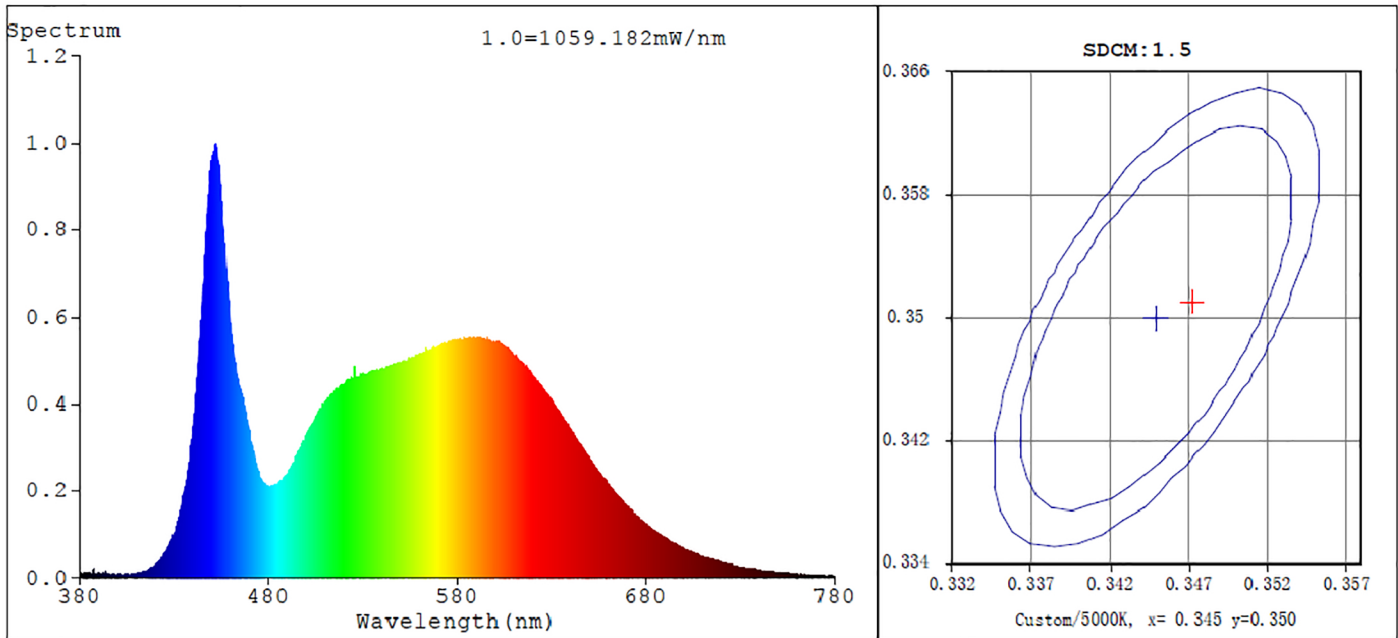

UFO 240W 5000K CCT

