

# LEGACY AREA LIGHT 200W



STANDARD




The LegacyArea light is a group of premium architectural LED lights designed to illuminate parking areas, pathways, building facades, loading docks and a wide variety of other large general site lighting applications. Multiple mounting options make the 200W Legacy Area Light a versatile light for flood lighting, pole, ground and wall mounted area lighting and other outdoor lighting requirements.

## FEATURES

- Standard in 5000K.
- 100-277V AC input voltage providing long-life LEDs with 50,000 hours of operation ( $T_a=86\text{ F @LM70}$ ).
- 29,000 lumens.
- Philips Lumileds LED chips.
- Premium SOSEN driver.
- Die cast aluminum housing with durable dark bronze powder coat finish with at least 2 mils thick on all surfaces and a heat resistant polycarbonate lens.

## MOUNTING OPTION & DIMENSIONS

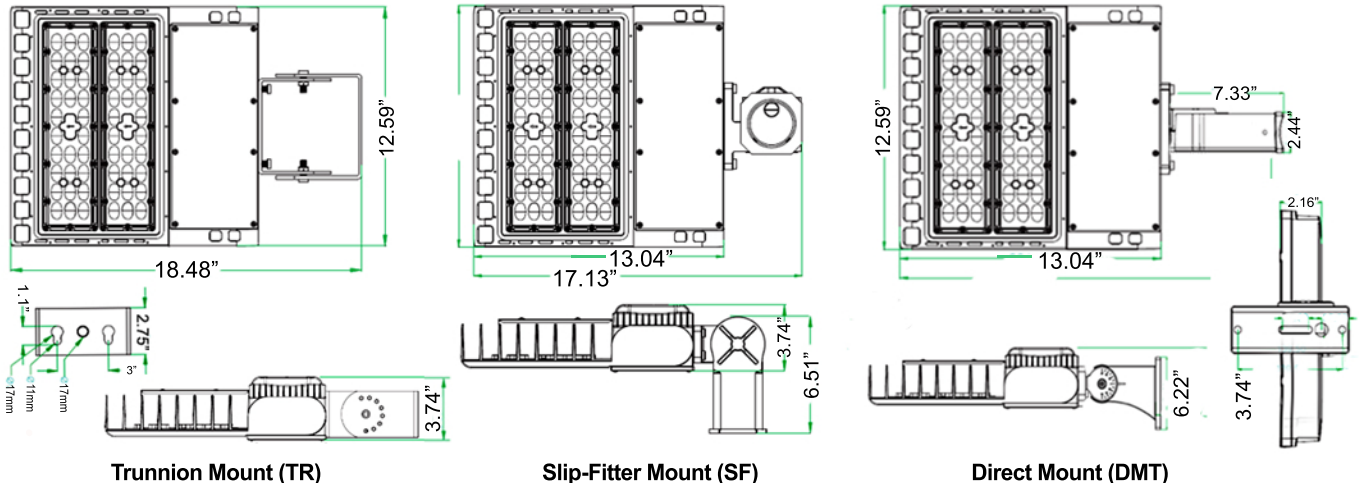

## WARRANTY & LISTING

- ETL.
- DLC Listed
- IP65 “wet Locations” rated.
- Flicker free per IEEE 1789-2015 (no observable adverse effects of flicker at 100% light output level).
- 5-year warranty on all electronics and housing.
- Power factor > 0.90.
- Universal 100-277 AC voltage (50-60 Hz).
- Total harmonic distortion <20%.
- Color rendering Index >80.
- Optional full and half glare shields are available.
- Easy installation in new construction or retrofit.
- 0-10 Dimmable. Dims down to 10%
- Trunion and Slip-fitter mounting accessories are adjustable up to 90 degrees in both directions.

## ORDERING INFORMATION

PART #	Color Temp	Mounting options	Accessories
CLL-LGCY-200W	5000K	TR Trunion Mount DMT ADJ Direct Mount SF Split-Fitter Mount	Half Shield DTH-LGCY-SM-HGS Full Shield DTH-LGCY-SM-FGS

Specifications and dimensions subject to change without notice

[www.certifiedledlight.com](http://www.certifiedledlight.com) (800)373-2110  
13375 N. Stemmons Frwy, Ste 300, Farmers Branch TX 75214

CLL-LGCY-200W  
Rev May 22, 2020

# LEGACY AREA LIGHT 200W


Part No	CLL-LGKY-200W-5K(SF,TR, DMT)
LED Type	PHILIPS LUMILEDS
LED QTY	224 PCS
Luminous flux	145 LM /W (CCT=5000k) 5%
Luminous flux	29,000 LM (CCT=5000K) 5%
CCT	5000 K
Beam Angle	TYPE III/90 X 120
CRI	> 80 Ra
System Efficiency	> 90
Power Supply	SOSEN
Input Voltage	AC 100- 277 V
Power Frequency	50 / 60 Hz
Output Voltage	Dc 28.8-48V
Output Current	2.5-5A (Constant Current)
Power Efficiency	> 90%

Power factor	> 0.90
Total Harmonic Distortion	< 15%
System Power Consumption	200 W ± 5 W
LED Power Consumption	190 W ± 5 W
Fixture Material	ADC12 Aluminum alloy
Ingress Protection	IP 65
Net Weight	20.46 Lbs ± 1.1 Lbs
Gross Weight	22.22 Lbs ± 1.1 Lbs
Life Span	>50,000 Hrs (Ta=86°F@LM 70)
Junction temperature	< 167° F (Ta=86°F)
Storage Temperature	(-40° F ~ + 158° F)
Operating Temperature	(-22° F ~ +122° F)
Operating Humidity	15 – 90 % RH
Outlook Dimensions	L 17.12" * W 12.59" * H 3.74"
Carton Size	L 22.4" * W 14.5" * H 5.7"


## ACCESSORIES

### Shields

Half

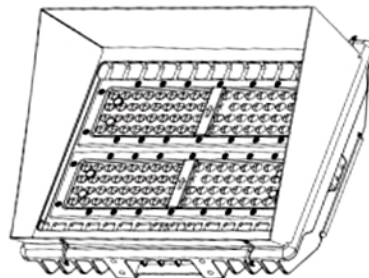

Full

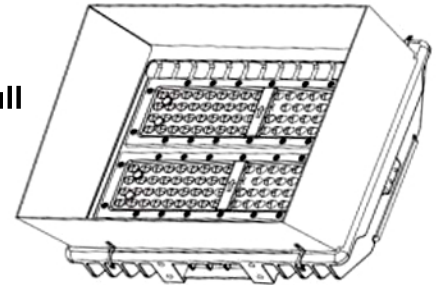

CLL-LGKY-SM-HGS

CLL-LGKY-SM-FGS

## PHOTOMETRIC DATA

### 200W - 29,000 LUMENS

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

