



Certified LED Lights®

STANDARD




APPLICATIONS

The 6" Architectural downlight is a recessed retrofit solution that has an integrated LED power supply and thermal management system combined in a single compact unit designed to fit most standard 6" openings. Also works in new construction applications. It is wattage and kelvin selectable to fit most needs.

FEATURES

- * Long life LED's with up to 50,000 hours at 70% lumen maintenance
- * Dimmable with 0-10V
- * Save 75% compared to incandescent sources
- * Built-in LED high efficiency driver with a power with factor >0.90
- * Input power of 120V-277V. 50 - 60Hz
- * Built-in LED Driver
- * Operation temperature of -4 F - 104 F

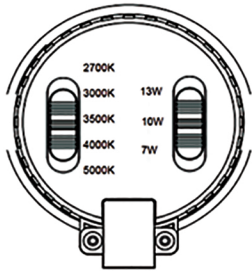

- * 6 color temperature: 27K, 3K, 35K, 4K & 5K selectable
- * Wattage: 10W - 800 Lm, 15W - 1200 Lm and 22W - 1850 Lm selectable

ORDERING INFORMATION

PART #	POWER	LUMENS	KELVIN RATING
CLL-846-90-10-CCT6"	10W	800	2700K
	15W	1200	3000K
	22W	1850	3500K
			4000K
			5000K



HOUSING

- * Compatible w/ most 6" architectural housings or frames
- * Universal Housing Compatibility
- * Durable thermoplastic and aluminum construction

WARRANTY / LISTING

- * Tested in accordance with IESNA LM79 & LM 80.
- * ETL Listed for wet locations, US & Canada
- * IC rated for direct contact with insulation (new construction & retrofit).
- * Energy Star certified
- * Five year warranty on all electronics and housing.

DIMENSIONS

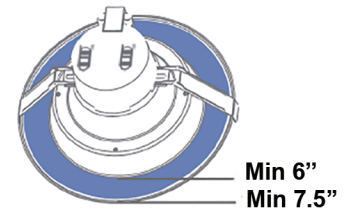

MOUNTING

- * The adjustable housing clips allow for installation in a large range of commercial and architectural housings ranging from 6.0"-7.5" (153-190mm). These spring-action clips push up easily and fit securely for both retrofit and new construction installations.
- * Optional Frame-in Kit available