



Certified LED Lights®

Product Data Sheet
Wet Locations Exit Sign



Product Overview

Exit signs are essential life-safety devices designed to clearly identify emergency exit routes in commercial, industrial, and public buildings. Built for reliability and continuous operation, modern LED exit signs provide bright, energy-efficient illumination and dependable performance during normal conditions and power outages, helping ensure safe and orderly evacuation in emergency situations.

The EXTSGN-WTL series is a waterproof thermoplastic LED exit sign that delivers an exceptional balance of durability, style, and cost-efficiency for outdoor and demanding environments. Designed specifically for wet location applications, it features a fully sealed lens and housing that protect internal components from moisture, rain, and humidity, ensuring reliable performance in harsh conditions.

The rugged thermoplastic construction resists corrosion and impact. Energy-efficient LED technology provides bright, uniform illumination with low maintenance requirements, making the EXTSGN-WTL series a dependable and economical solution for code-compliant egress signage in exterior installations.. This exit sign comes with 5-yr warranty on all electronics and housing. The battery is prorated for five years

- * UL listed
- * Ultra bright, energy efficient, long life Red or Green LED's
- * Universal 100/277V input
- * 700mAh NiCad battery
- * Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- * Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours* 5VA flame retardant, UV-stabilized polycarbonate in white, black or gray finish
- * High-impact resistant, UV-stabilized polycarbonate clear lens
- * Corrosion-resistant enclosure with engineering grade silicone gasket
- * Knockouts provided for conduit feed applications
- * EZ snap-out Chevron directional indicators
- * Universal single or double sided, suitable for ceiling, wall or side mounting

Product Warranty



Applications



Schools



Offices



Commercial
Buildings



Healthcare

Highlights and Certifications



UL Listed




Wet Location

Key Specifications

- * UL Listed
- * Wet location rated
- * Operating temperature: -32°F to 122°F
- * Five year warranty on all electronics and housing. Battery prorated for five years
- * Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- * Polycarbonate mounting canopy included for top or end mount
- * Universal for wall mount, ceiling mount and side mounting
- * Red / Green selectable
- * Single or double sided

Dimensions

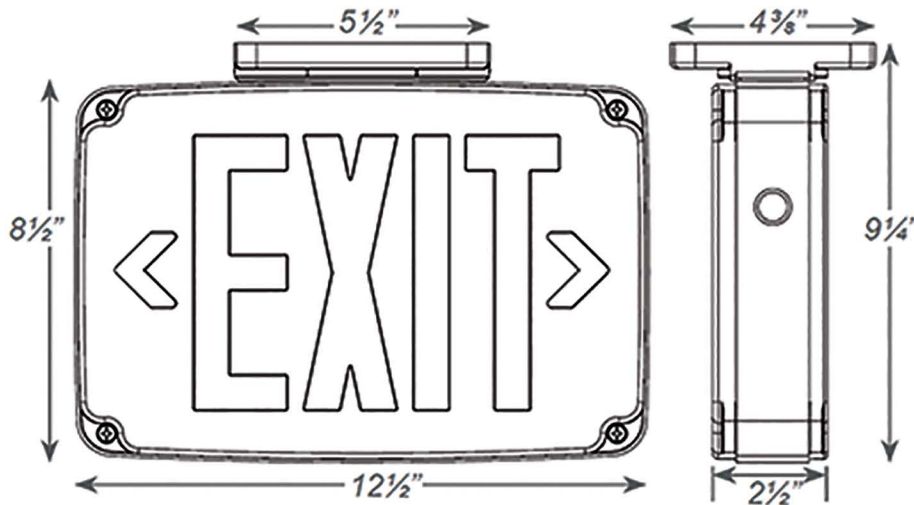

Ordering Guide

PART #	No of faces	Letter Color	Housing		Battery	
EXTSGN-WTL	Universal / double	Universal red / green	G	Grey	EM	Battery