


Certified LED Lights®

Product Data Sheet

Architectural Outdoor Emergency Light



Product Overview

The architectural outdoor emergency egress is a premium, high-performance lighting solution engineered to provide dependable illumination in outdoor environments, ensuring safety and visibility during power outages and emergency situations. Combining a sleek, modern design with rugged durability, this fixture is ideal for a wide range of applications, including commercial buildings, walkways, parking areas, parks, campuses, and other public spaces. Its advanced LED modules deliver bright, uniform light, producing clear visibility that enhances safety and aids in safe egress during emergencies. Designed for maximum reliability, the unit operates on a dependable AC power source and features an integrated rechargeable battery backup that automatically activates when the main power supply fails, providing uninterrupted illumination exactly when it is needed most.

Constructed from premium, corrosion- and weather-resistant materials, the housing is fully sealed to protect against dust, moisture, and harsh outdoor elements, ensuring long-lasting performance even in the most challenging conditions.

This emergency light is backed by a five-year warranty on the unit and a five-year prorated warranty on the battery, providing peace of mind and long-term reliability. Its compliance with all relevant safety and emergency lighting standards ensures it meets rigorous performance requirements while safeguarding occupants and property.

Applications



Schools



Offices


 Commercial
Buildings


Healthcare

- * Can be used as a Normally ON or Normally Off fixture on a switched circuit
- * Photocell control sensor included as standard for use as dusk-to-dawn fixture
- * Offers long lasting, efficient, ultra bright white LED's.
- * 15 watt LED - 5000K -1801 Lumens @ 129 Lu/W
- * Mirror-bright reflector and prismatic polycarbonate refractor
- * Phillips Lumiled SMD2835
- * Universal Dual 120V/277 voltage
- * Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- * Maintenance free, rechargeable NiCd battery
- * Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 5W 90-minute emergency illumination
- * Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hrs.

Product Warranty



Highlights and Certifications



UL Listed



IP65 protection




DLC
Premium

Key Specifications

- * UL Listed
- * DLC premium
- * Wet location rated
- * Universal knockout pattern on back plate for wall mount
- * Treaded opening at the top of the enclosure for conduit mount
- * Decorative, low profile, architectural design
- * Die-cast aluminum housing
- * Durable powder-coated finish in dark bronze
- * Sealed and gasketed
- * Working temperature: -40°F to 113°F
- * Five year warranty on all electronics and housing. Battery prorated for five year

Dimensions

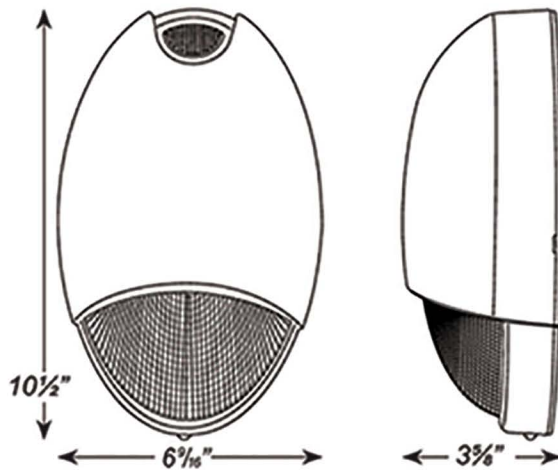

Ordering Guide

PART #	Lumens /Watt	Power	Lumens	Voltage	Emergency
MWP06	129	15W	1,801	120 – 277V	5W for 90 min