


Certified LED Lights®

Product Data Sheet
Wrap Light



Product Overview

The selectable wrap light is a sleek and energy-efficient lighting solution designed to provide versatile performance for a wide range of commercial and residential applications. Featuring adjustable wattage settings of 20W, 25W, 33W and 40W, this fixture allows users to customize light output based on room size and illumination requirements, helping optimize energy consumption without sacrificing brightness.

In addition, the selectable color temperature options of 3000K, 3500K, 4000K, 5000K and 6500K offer flexibility to create warm, neutral, or crisp daylight environments, making it ideal for offices, schools, hallways, kitchens, utility rooms, and retail spaces.

Its slim profile design delivers a modern, low-profile appearance that blends seamlessly into ceilings while maximizing light distribution through a high-quality diffuser that minimizes glare and ensures uniform illumination. The lightweight yet durable frame simplifies handling and significantly reduces installation time, making it suitable for both new construction and retrofit projects.

Engineered for long-term reliability, this wrap light provides consistent, flicker-free performance and is backed by a 5-year warranty, offering dependable operation, reduced maintenance costs, and peace of mind for property owners and contractors alike.

Sensor ready using preconfigured wiring for quick and easy installation. The sensor is sold separately.


Applications



Retail



Schools



Kitchen



General area

Main Features

- * Kelvin Selectable 3K, 3.5K, 4K, 5K, 6.5K
- * Wattage Selectable : 20W, 25W, 33W, 40W
- * 140 to 145 Lumens / Watt
- * 2,800 to 5,800 Lumens
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Total harmonic distortion < 20%
- * 0-10V dimming
- * Color rendering index > 80
- * Steel Housing
- * Frosted lens
- * Operating temperatures from -4°F to 122°F

Product Warranty



Highlights and Certifications




UL listed




IP65 Wet
Location rated



DLC 5.1 Premium
Listed



Field Selectable wattage 4-way dip switch:



Field Selectable CCT 5-way dip switch:


Key Specifications

- * Kelvin Selectable 3K, 3.5K, 4K, 5K, 6.5K
- * Wattage Selectable : 20W, 25W, 33W, 40W
- * UL Listed
- * IP65 Wet Location Rated
- * DLC Premium 5.1 Listed
- * 5-year Warranty

Performance

20 W						25 W						33 W					
Color	3000	3500	4000	5000	6500	Color	3000	3500	4000	5000	6500	Color	3000	3500	4000	5000	6500
Lumens	2,800	2,800	2,880	2,860	2,900	Lumens	3,500	3,500	3,600	3,575	3,625	Lumens	4,620	4,620	4,752	4,719	4,785
Lumens / Watt	140	140	144	143	145	Lumens / Watt	140	140	144	143	145	Lumens / Watt	140	140	144	143	145
40 W																	
Color	3000	3500	4000	5000	6500												
Lumens	5,600	5,600	5,760	5,720	5,800												
Lumens / Watt	140	140	144	143	145												

Dimensions

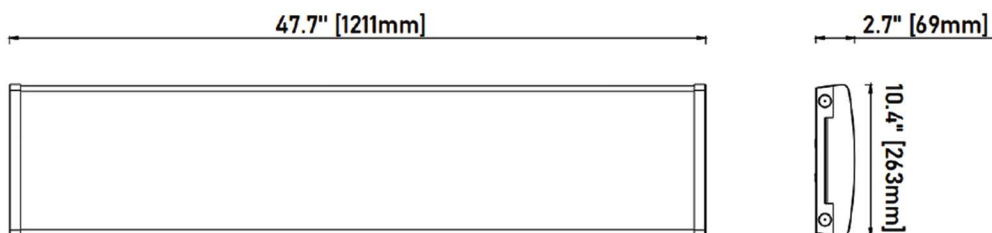

Ordering Guide

PART #	Kelvin Selectable	Lumens	Lumens / Watt	Wattage Selectable	Length
WRP-4FT-M40W-5CCT-S	3K, 3.5K, 4K, 5K, 6.5K	2,800 to 5,800	140 LU/W to 145 Lu/W	20W / 25W / 33W / 40W	4FT

Motion Sensor (Sold Separately)

- * US002-01VP Heisen quick connect microwave motion sensor