


Certified LED Lights®

Product Data Sheet
Wet Location Emergency Light



Product Overview

A wet location remote-capable emergency egress is a rugged, high-performance life-safety fixture engineered to provide dependable illumination in harsh environments where moisture, rain, humidity, or wash-down conditions are present. Constructed with a fully gasketed, corrosion-resistant housing made from UV stabilized polycarbonate—and sealed to prevent water ingress, this fixture is specifically designed for outdoor applications, parking garages, industrial facilities, loading docks, food processing plants, and other demanding settings.

Its wet location rating ensures reliable operation in direct exposure to the elements, while high-output, energy-efficient LED lamp heads deliver bright, uniform emergency lighting to clearly illuminate paths of egress during power outages.

As a remote-capable unit, it includes sufficient battery capacity and output to power additional remote lamp heads, allowing expanded coverage and flexible system design without the need for multiple independent power sources. Advanced circuitry provides protection against overcharging and deep discharge, helping extend battery life and maintain consistent readiness.

- * Sealed and gasketed weather proof lamp heads with high performance chrome-plated metallized reflector and tempered glass lenses for optimal light distribution
- * Adjustable long lasting, efficient, ultra bright white LED lamp heads
- * 1.875 watt (15 LEDs x 0.125) per head
- * Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- * Dual 120/277 voltage standard
- * Remote capacity of 3.7 watt standard in operating temperatures of 32° F – 122°F
- * 9.6V long life, maintenance-free, rechargeable NiCd battery
- * Internal solid-state transfer switch automatically connects the internal battery to LED lamp heads for minimum 90 minute emergency illumination
- * Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

Product Warranty



Applications



Schools



Offices



Commercial
Buildings



Healthcare

Highlights and Certifications



UL Listed



Wet Location



California
Energy
Compliant




Cold Location

Key Specifications

- * UL Listed
- * Wet Location
- * Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- * CEC: Certified to CEC under Title 20 Regulations
- * Housing: Corrosion-resistant 5VA flame retardant UV-stabilized polycarbonate in grey finish
- * Sealed and gasketed housing with hinged cover
- * Sealed test switch
- * Mounting: External mounting brackets for simplified surface mounting
- * Knockout for conduit applications
- * Working temperature: (-4°F – 122°F)
- * Five year warranty on all electronics and housing
- Battery prorated for five years

Dimensions

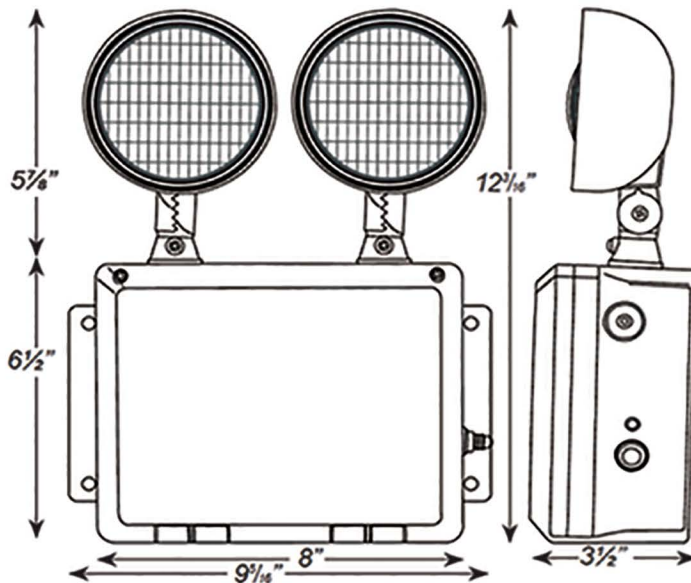

Ordering Guide

PARTS #	Housing Color	Power
WLTFX-2	Blank= Gray	Dual 120 /277 Volt