



Certified LED Lights®

Product Data Sheet
Mini Wall Pack




Product Overview

This 3K, 4K and 5K field adjustable mini LED wall pack is a compact yet powerful exterior lighting solution engineered to deliver exceptional brightness, energy efficiency, and long-term reliability for commercial and residential applications. The color temperature choices enhances visibility, security, and color clarity—making it ideal for building perimeters, walkways, loading areas, stairwells, and entry points where clear illumination is essential. The high-efficacy LED design ensures consistent, uniform light distribution with minimal glare and reduced shadowing, improving safety and overall site appearance. It is also wattage selectable with 3 positions: 15W, 20W, 30W. Its compact “mini” profile allows for easy installation in tight spaces while maintaining a modern, low-profile aesthetic that blends seamlessly with various architectural styles. Built with a durable housing designed to withstand harsh outdoor conditions, this wall pack provides reliable operation in a wide range of temperatures and environments. Backed by a 5-year warranty, it delivers peace of mind through dependable performance, reduced maintenance requirements, and long service life, making it a smart, cost-effective lighting upgrade for property managers, contractors, and facility owners seeking efficiency, durability, and high-quality illumination in one streamlined fixture.

Applications



Homes



Perimeter



General area



Pathways

Main Features

- * CCT: 3K, 4K, 5K
- * 121 Lu/W 3727LM @ 3000K
- * 133 Lu/W 3974 LM @4000K
- * 123 Lu/W 3803 LM @ 5000K
- * Wattage selectable: 15W Low, 20W Medium, 30W High
- * Long-life SMD285 Lumileds
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Power factor > 0.90
- * Operating temperature : -40°F - 122°F
- * Integrated dusk to dawn photocell
- * 0-10V dimming is standard
- * Total harmonic distortion < 20%
- * Color rendering index > 80
- * Exterior parts are protected by Super Durable thermo-set powder coat finish that provides superior resistance to corrosion and weathering. Minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.
- * Polycarbonate matte lens
- * Beam angle: H105°V75 degrees

Product Warranty



Highlights and Certifications



Listed DLC
Premium




IP 65



UL Listed



0-10V dimming





Field selectable CCT 3-way dip switch:
3K, 4K, 5K



Field selectable CCT 3-way dip switch:
15W, 20W, 30W

Dimensions

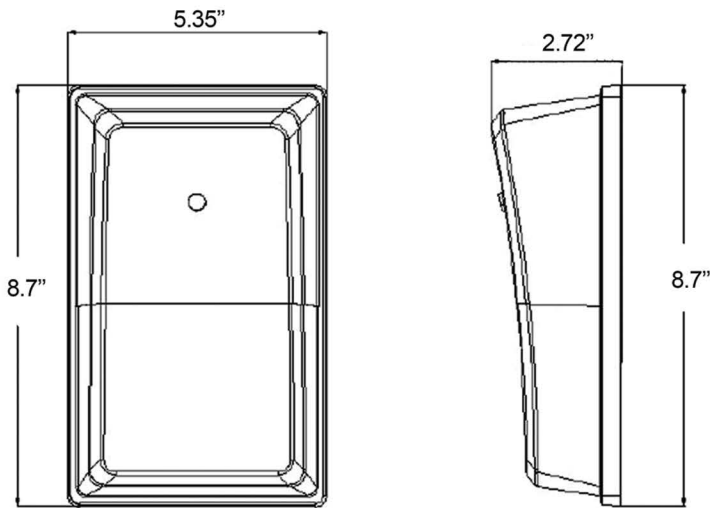


Ordering Guide

PART #	Color Temp	Lumens	Lumen/w att	Wattage	Voltage
MWP10B-30W-3TCP	3K, 4K, 5K	3,727 / 3,974 / 3,803	121-133	15W, 20W, 30W	AC 120-277V

Key Specifications

- * DLC Premium Listed
- * UL Listed
- * IP 65 rated
- * Operating temperature : -40°F - 122°F
- * 5 year warranty on all electronics and housing


Wattage and Kelvin Selectable Switches

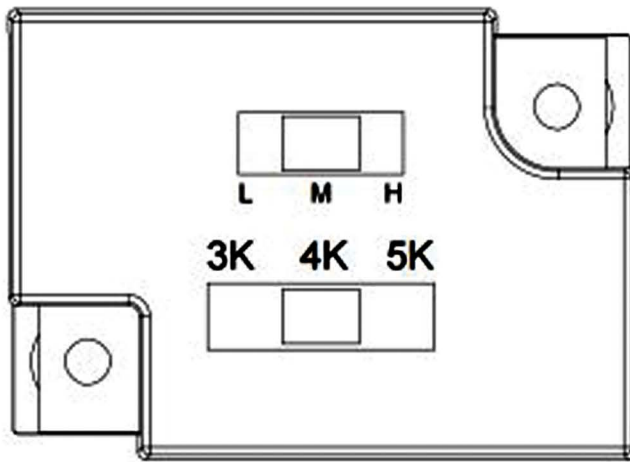

**L= 15W
M= 20W
H= 30W**

Photometric Data

Luminous Intensity Distribution Curve

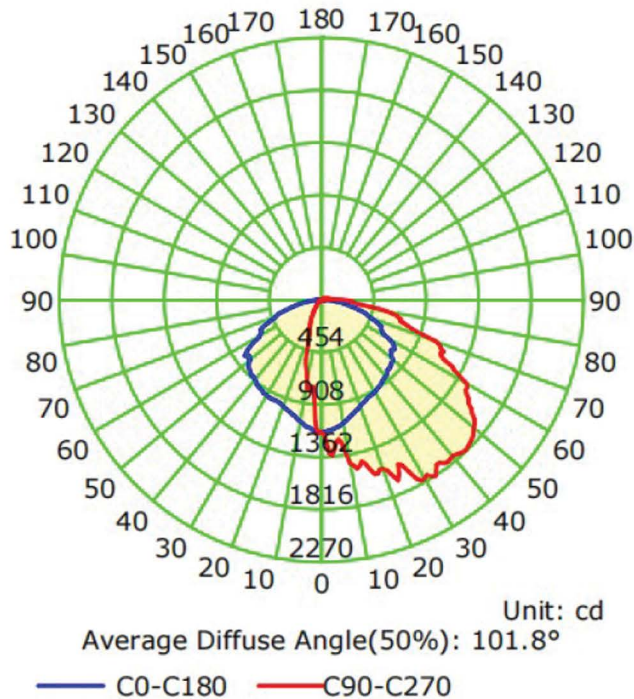

The Average Illuminance Effective Figure

