

## STANDARD



### APPLICATIONS

The 5050FX60-RGBWW series is a flexible LED strip lights that is the perfect solution for a wide variety of architectural and accent lighting applications including cove lighting, under-cabinet lighting, back-lighting, pathway lighting and decorative lighting. Our flexible LED strip lights are made with a factory soldered lead on one end of a 16.4' reel that allowing you to cut pieces to the exact length that you need. We offer 12mm, 16.4 ft rolls with pin connectors in IP65.

### FEATURES

- \* LED count: 60 per meter (18 per foot)
- \* Suggested driver: Meanwell LPV-100-24
- \* Lumens : 88 lm - 8360 LU per roll (white @2700K)
- \* Rolls are 5m / 16.4ft. 12mm width (IP65)
- \* Working hour 50,000 hours
- \* SMD LED spacing: 0.65"- 16.6 mm
- \* PCB Width 12mm
- \* Best Color Consistency (SDCM<3)
- \* Color temperature with 80 >CRI
- \* Double circuit board for better electric stability
- \* Soldering free connector for convenient installation
- \* Suggested controller: CLL-CON-2.4G-RGBW 5 channel controller



### WARRANTY & DETAILS

- \* Input voltage: DC 24V
- \* Energy grade A
- \* Power Consumption: 19 watts per meter (3.3ft)
- \* Illumination Angle 120°
- \* IP65 - Silicone Sleeve
- \* Tested in accordance with IESNA LM 80
- \* UL Listed
- \* 3-year warranty
- \* Lead free technology (ROHS)

### ORDERING INFORMATION


PART #	LED	Lumens per watt	POWER	Lumens per roll
CLL-5050FX60-19RGBWW	RGBWW	88 lm	5.79W/ FT - 95W/roll	8360 LU

### WIRING

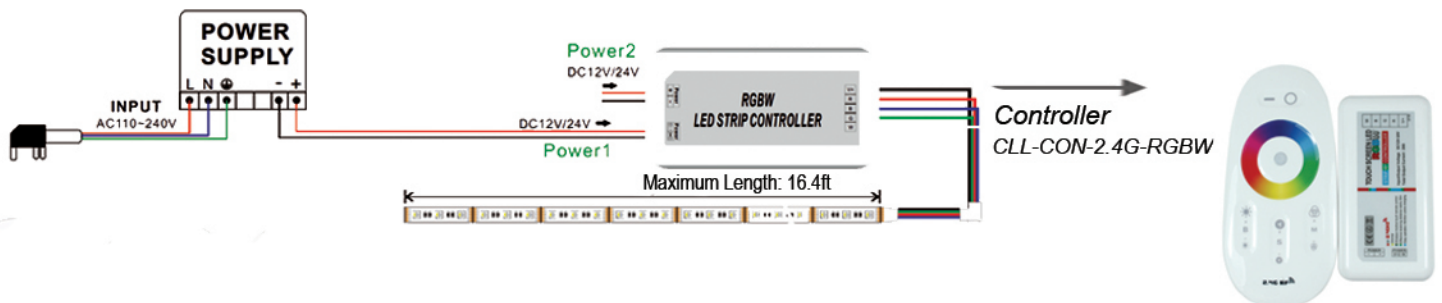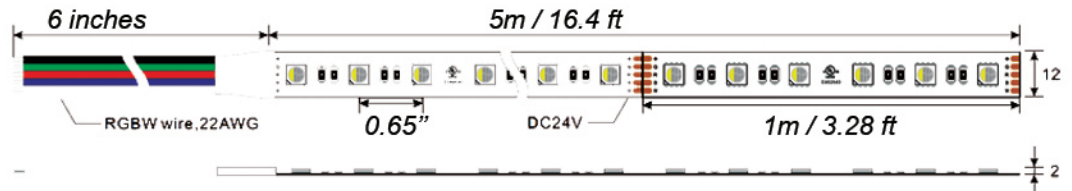

## LAYOUT OPTIONS

Note: Always check the wattage of your LED strip. Available Wattage= Power supply x 0.8

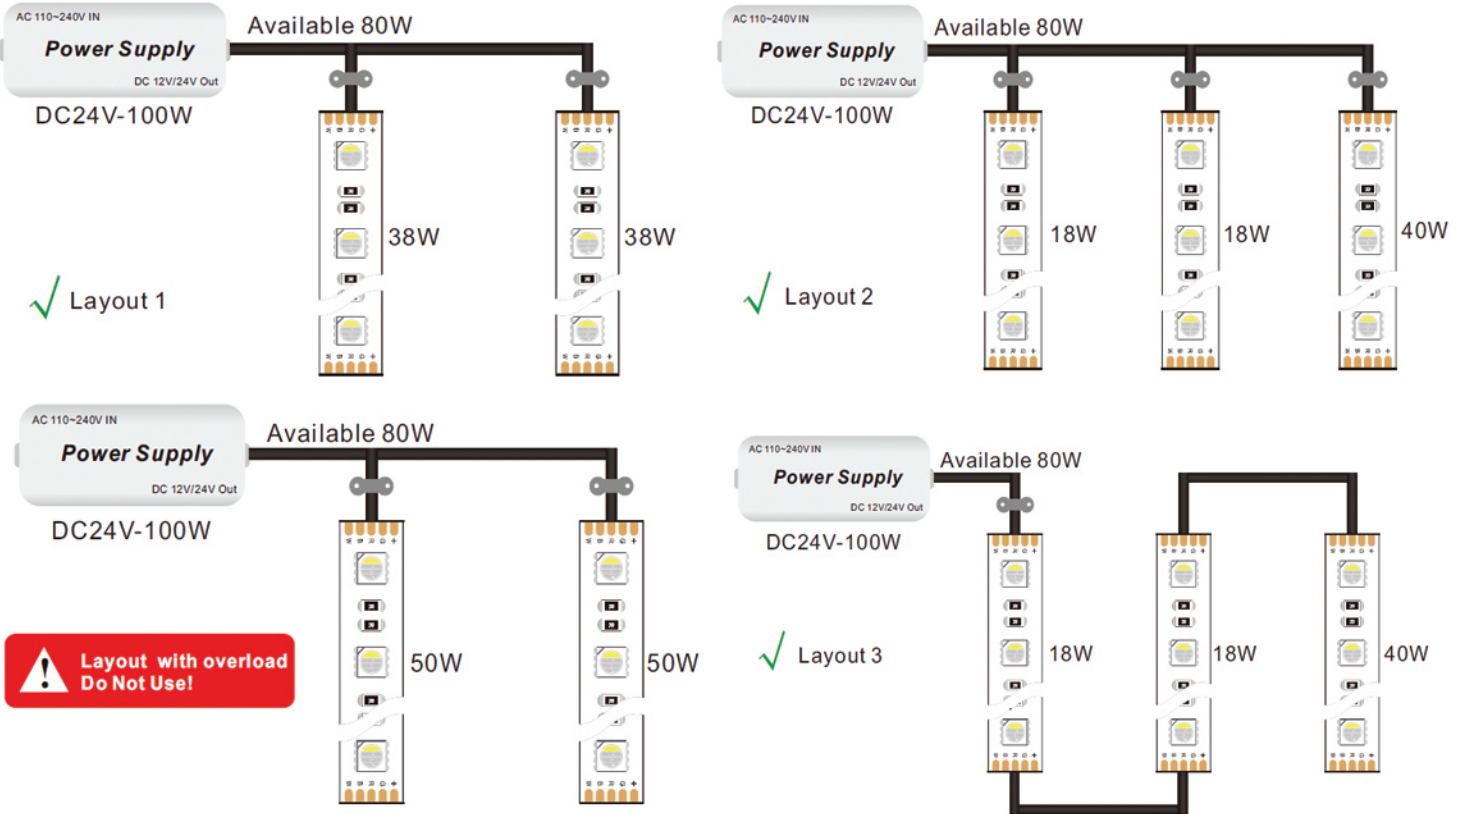

## PHOTOMETRIC DATA

