



STANDARD



### APPLICATIONS

The CLL-RWP01B Series is a rugged, durable LED Wall Pack that provides full adjustability of the LED modules. Light can be focused up, down, or anything in between. It is perfect for outdoor perimeter and area lighting. With a die cast aluminum housing and a polycarbonate lens, the CLL-RWP01B Series will stand up to many years of harsh environmental conditions. High-efficacy, long-life LEDs provide both energy and maintenance cost savings compared to traditional MH / HID Wall Packs

### FEATURES

- \* Color temperatures 3K, 4K & 5K selectable
- \* 25W and 60W available
- \* Seoul chips SMD3030
- \* NO UV or IR in the beam
- \* Universal 120-277 AC voltage (50-60Hz) is standard
- \* Beam angle: 60 degree
- \* Power factor > 0.90
- \* 0-10V dimming capability standard
- \* Total harmonic distortion < 20%
- \* Color rendering index > 80
- \* Die cast aluminum housing with durable, dark bronze powder coat finish
- \* Easy installation in new construction or retrofit applications


### ORDERING INFORMATION

| PART #             | CCT Color Temp | Wattage | Lumens |       |       | Lumens per Watt |     |     |
|--------------------|----------------|---------|--------|-------|-------|-----------------|-----|-----|
|                    |                |         | 30K    | 40K   | 50K   | 30K             | 40K | 50K |
| CLL-RWP01B-25W-CCT | 30K, 40K, 50K  | 25      | 3,175  | 3,675 | 3,325 | 127             | 145 | 133 |
| CLL-RWP01B-60W-CCT | 30K, 40K, 50K  | 60      | 7,500  | 8,580 | 7,860 | 125             | 143 | 131 |

### WARRANTY & DETAILS



- \* DLC Premium
- \* cULus listed for wet locations in ambient temperatures from (-40F to 113°F)
- \* IP65 rated for ingress protection
- \* Complies with FCC Part 15, class B
- \* 5-year warranty on all electronics and housing

### DIMENSIONS

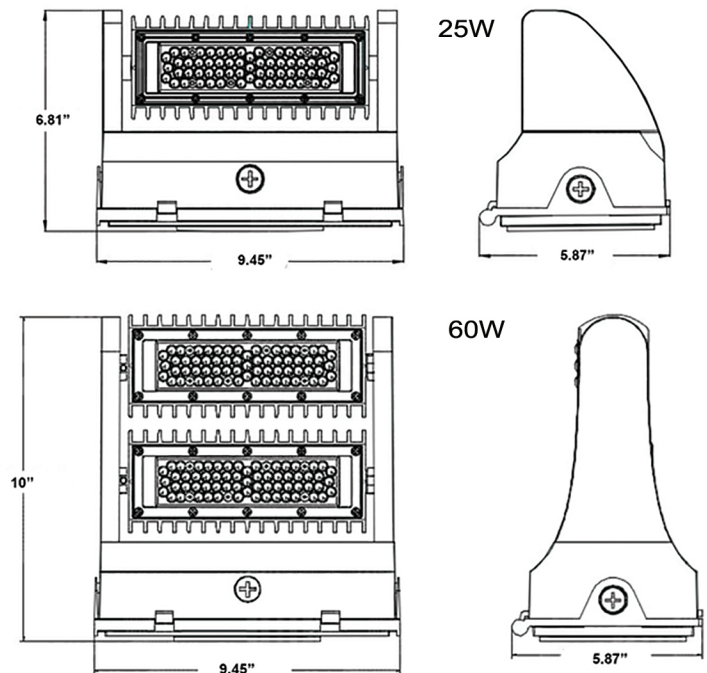

## PHOTOMETRICS

### 25W WALLPACK

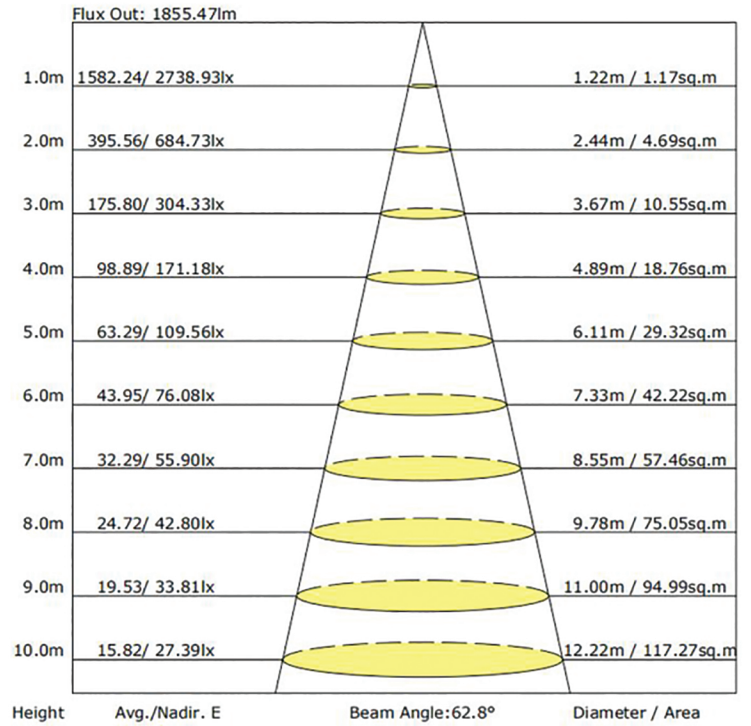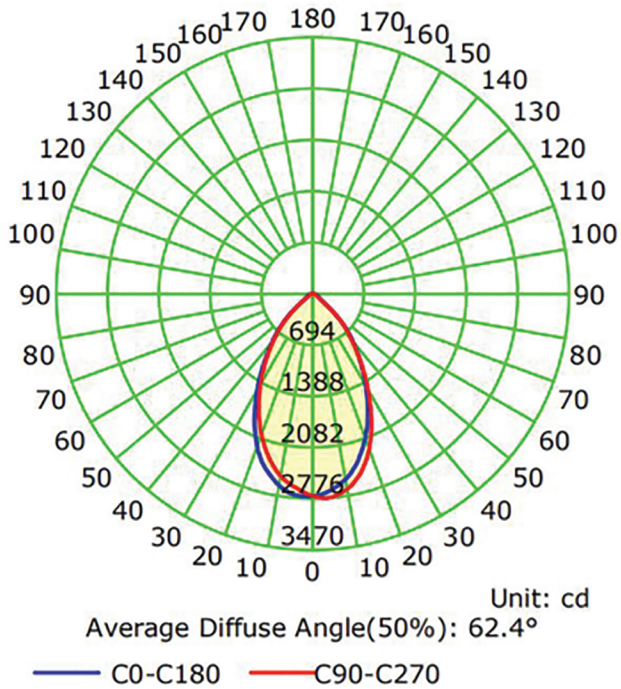

### 60W WALLPACK

