



Certified LED Lights®

Product Data Sheet
Bollard



Product Overview

This black selectable bollard light is a versatile and architecturally refined outdoor lighting solution designed to deliver both performance and aesthetic appeal in commercial and residential landscapes. Featuring a durable die-cast aluminum housing finished in black powder coat, this bollard is built to withstand harsh weather conditions while maintaining its color and corrosion resistance over time.

Its wattage-selectable functionality allows installers to adjust light output to suit pathway, courtyard, parking lot, or perimeter applications, providing flexibility to meet varying illumination requirements without changing fixtures. In addition, the Kelvin-selectable feature enables users to choose between multiple color temperatures ensuring the fixture complements both design intent and safety needs.

Engineered for reliable outdoor performance, the bollard is typically rated for wet locations and designed with a robust lens system to distribute glare-controlled, even lighting along walkways and landscaped areas. Easy installation and internal switching for wattage and color temperature selection make it adaptable for evolving project requirements.


Backed by a comprehensive 5-year warranty, this black selectable bollard offers long-term durability, customizable performance, and dependable quality, making it an excellent investment for property managers, contractors, and lighting designers seeking flexibility and lasting value.

- * CCT Selectable : 35K, 4K, 5K
- * Wattage selectable: 12W, 18W, 24W
- * 0-10v Dimming
- * Lumens/watt: 128-132
- * Lumens: 1,536 - 3,168 Lumens
- * Lumileds 2835 Chips
- * UL driver
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Total harmonic distortion < 20%
- * Lighting angle: 120 degrees
- * Color rendering index > 80
- * Operating temperatures from -40 F to 104 F
- * **Housing:** Heavy die-cast aluminum alloy housing with black powder-coated finish
- * Round appearance for good decorative effect, sized in 3.5ft height black polyester powder-coat finish
- * Robust ground cage pre-buried installation.

Product Warranty



Applications



Perimeter



Landscaping



General area



Pathways

Highlights and Certifications



DLC Premium Listed




UL Listed




Wet Location



0-10V Dimming



Field selectable CCT 5-way switch:
3K, 4K, 5K



Field selectable Wattage 3-way switch

Key Specifications

- * UL Listed
- * CCT Selectable : 35K, 4K, 5K
- * Wattage selectable: 12W, 18W, 24W
- * DLC Premium listed
- * 5-year warranty




CCT temperature selectable switch

Performance

12 Watts				18 Watts				24 Watts			
Color	3,500K	4,000K	5,000K	Color	3,500K	4,000K	5,000K	Color	3,500K	4,000K	5,000K
Lumens	1,536	1,584	1,560	Lumens	2,304	2,376	2,340	Lumens	3,072	3,168	3,120
Lumens / Watt	128	132	130	Lumens / Watt	128	132	130	Lumens / Watt	128	132	130

Dimensions

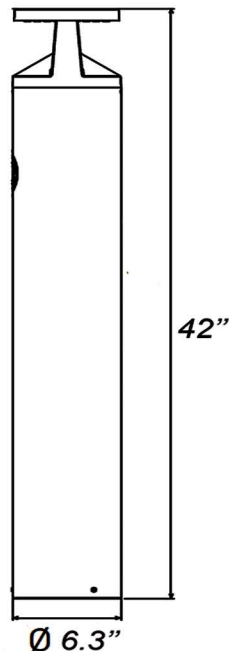

Other Characteristics




Round shape



Anchor bolts install

Anchoring Bolts

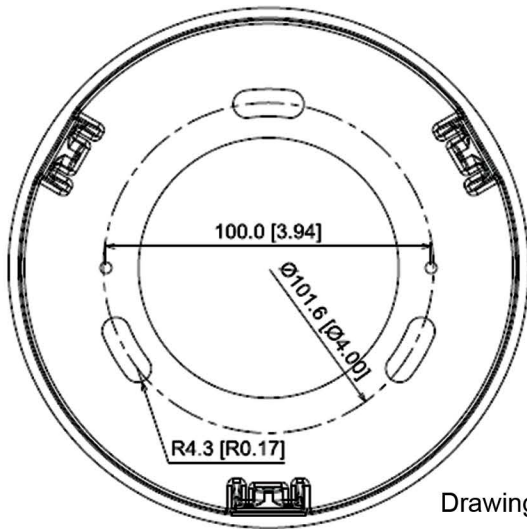

Drawing not to scale

Ordering Guide

PART #	Color	LUMENS PER WATT	LUMENS	WATTAGE SELECTALE	CCT
BR01R-4L-3CCT-BLK	Black	128 -132	1,536 – 3,168	12/18/24	3K, 4K, 5K