

APPLICATIONS

This architectural direct/ indirect linear strip light is a decorative commercial grade fixture. It offers both wattage and kelvin selectable with several adjustments to set the direct/ indirect light as needed. Designed to be linkable and support multiple mounting solutions (3ft cable kit and surface mounting is standard). Perfect for offices, retail, and other hospitality spaces.

FEATURES

- * CCT selectable in 3500K, 4000K, 5000K
- * Wattage selectable 15W, 20W, 25W (2Ft), 40W, 45W, 50W (4Ft) and 65W, 75W, 90W (8Ft)
- * Long-life LEDs provide 100,000 hours of operation
- * 130 lu/W LEDs
- * 0-10V dimming capability
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Power factor > 0.90
- * Beam angle: 360 degrees
- * Color rendering index > 80
- * Available in white only
- * Adjustable direct / indirect flux ratio:
direct: 100%, 70%, 50% ; indirect: 0%, 30%, 50%



Adjustable flux ratio


CCT Selectable
3500K, 4000K, 5000k

Wattage Selectable
15W, 20W, 25W (2Ft)
40W, 45W 50W (4Ft)
65W, 75W, 90W (8Ft)

WARRANTY & DETAILS


- * cULus listed for damp locations (-4°F to 122°F)
- * DLC Premium listed
- * Damp location rated
- * 5-year warranty on all electronics and housing

CONNECTOR (sold separately)

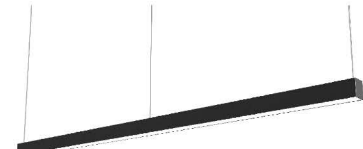

2 or more strip lights connected with straight connector

DIMENSIONS

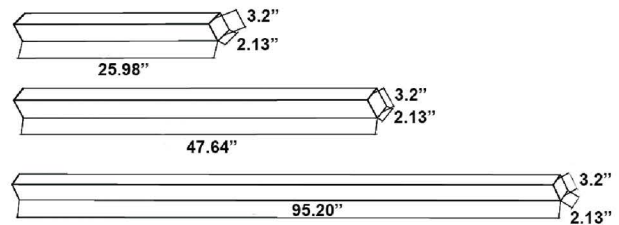

ACCESSORIES (Standard)



39.37" cable



Canopy plate

ORDERING INFORMATION

PART #	Size	Color Temp	Lumens	Lumen/watt	Wattage	Voltage
DTH-OL2FT152025W27-3545K-W	2Ft	3K, 4K, 5K	1950, 2600, 3250	130	15,20,25	AC 100-277V
DTH-OL4FT404550W27-3545K-W	4Ft	3K, 4K, 5K	5200, 5850, 6500	130	40,45,50	AC 100-277V
DTH-OL8FT657590W27-3545K-W	8Ft	3K, 4K, 5K	8450, 9750, 11700	130	65,75,90	AC 100-277V
DTH-OL180-2T	Straight connector (sold separately)					



PHOTOMETRIC DATA

2 Ft LINEAR LIGHT 25W @ 4000K

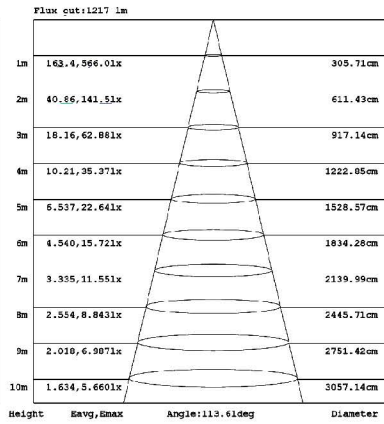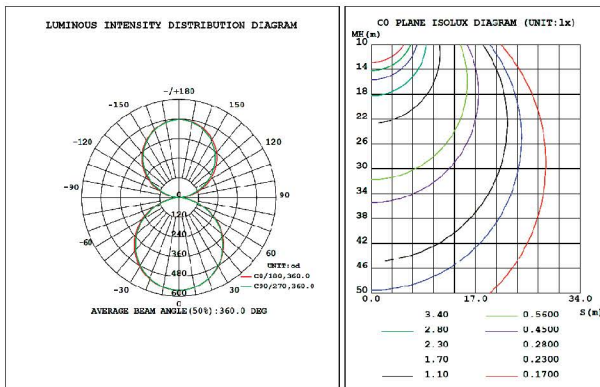



- 3% 0.1692lx 0.01572fc
- 5% 0.2820lx 0.0262fc
- 10% 0.5639lx 0.05239fc
- 30% 1.692lx 0.1572fc
- 50% 2.820lx 0.262fc

4 Ft LINEAR LIGHT 50W @ 4000K

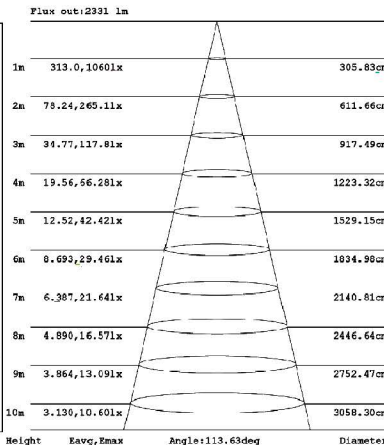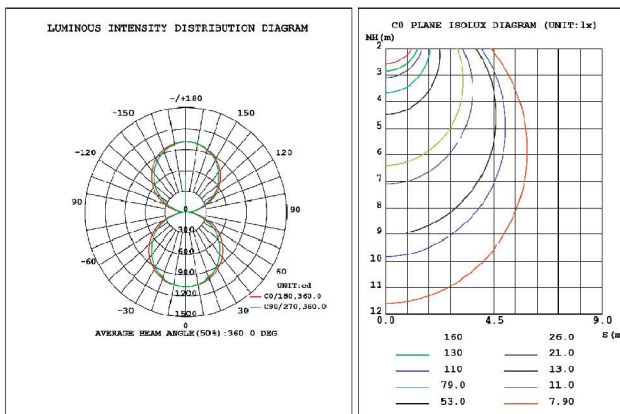

- 3% 0.3180lx 0.02954fc
- 5% 0.5299lx 0.04923fc
- 10% 1.060lx 0.09846fc
- 30% 3.180lx 0.2954fc
- 50% 5.299lx 0.4923fc

8 Ft LINEAR LIGHT 90W @ 4000K

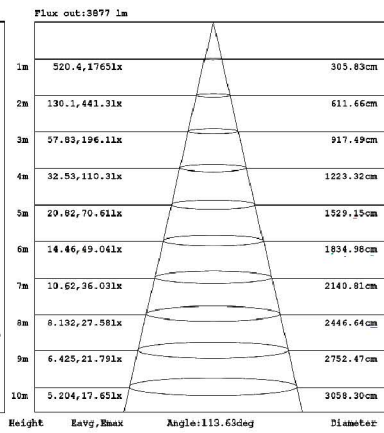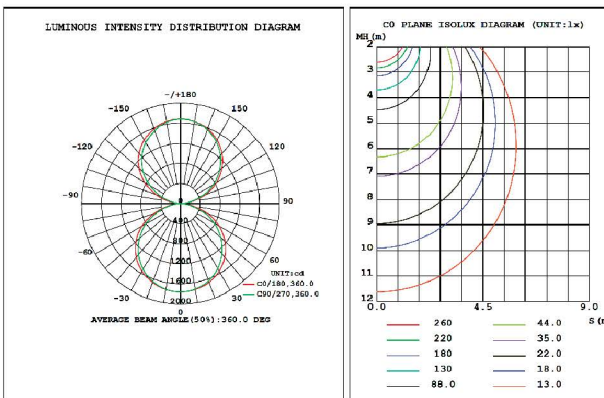

- 3% 0.5293lx 0.04917fc
- 5% 0.8822lx 0.08196fc
- 10% 1.764lx 0.1639fc
- 30% 5.293lx 0.4917fc
- 50% 8.822lx 0.8196fc