



STANDARD



APPLICATIONS

These are a 4" and 6" recessed downlight retrofit trim-kit with integrated LED power supply and thermal management system combined in a single compact unit designed to fit most standard 4" and 6" recessed cans. UL listed for wet location and 5 Year warranty and 5 CCT selectable.

FEATURES

- * Long Life LEDs with up to 50,000 hours at 70% lumens maintenance
- * Beam Angle: 106 degrees for D834 and 111 degrees for D836
- * Color temperature: 2700K, 3000K, 3500K, 4000K or 5000K selectable
- * D834 is 10W and 650 lm, D836 is 15W and 1000 lm
- * High efficiency LED driver with a power factor > 0.90 with input power of 120V, 50/60Hz
- * Triac dimmable: Down to 10% dimmable with most LED dimmers
- * Voltage: 120V 60 Hz
- * Operation temperature of -4F -104F

MOUNTING

- * Easy Installation with adjustable torsion spring
- * Torsion spring is designed to fit into 4" or 6" housing automatically without changing mounting tab
- * No tools required for installation

ORDERING INFORMATION

PART #	LUMENS	WATTS	LUMENS PER WATTS	SELECTABLE COLOR TEMP
CLL-D834-CCT-90-WH-B	650	10	65	27,30,35,40,50K
CLL-D836-CCT-90-WH-B	1,000	15	67	27,30,35,40,50K



2700K | 3000K | 3500K | 4000K | 5000K


WARRANTY & DETAILS

- * Tested in accordance with IESNA LM79 & LM 80
- * UL Listed for wet locations
- * Energy Star qualified
- * 5-year warranty of all electronics and housing

HOUSING

- * Compatible with most 4" and 6" recessed housings
- * Durable thermoplastic construction
- * E26 medium screw-base Edison connector provides easy retrofit of incandescent housings
- * Compatible with insulated, non-insulated and air-tight ceilings

DIMENSIONS

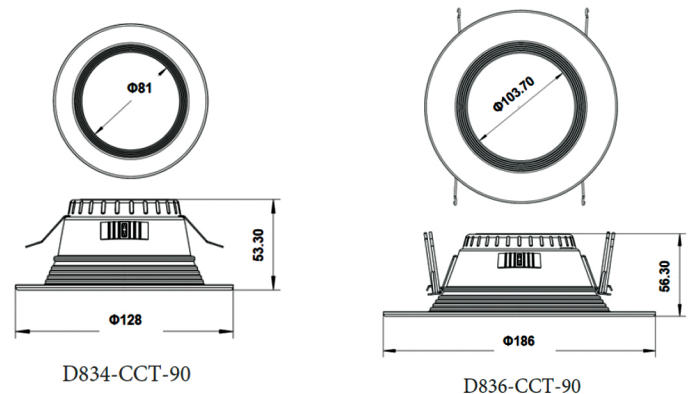

CCT SWITCH

