



Certified LED Lights®

Product Data Sheet

Wet Location Vandal Proof Light



Product Overview

This 5.0W LEDs provides a minimum of 90 mins of illumination during an emergency. This wet location vandal-proof emergency light is a rugged, high-performance lighting solution specifically designed to deliver dependable illumination in the harshest environments while withstanding physical abuse, moisture, and outdoor elements.

Engineered for commercial, industrial, and high-traffic public areas, this fixture is constructed of an injection-molded, 5VA flame rated, high-impact, UV-stabilized thermoplastic housing, ensuring superior protection against vandalism, tampering, and accidental damage. Its sealed design provides full protection against water, dust, and other contaminants, making it fully compliant with wet location requirements and ideal for outdoor use, parking garages, gyms, stairwells, and other challenging environments.

Equipped with bright, energy-efficient LED modules, the light produces clear, uniform illumination, ensuring safe navigation and effective emergency egress during power outages or critical situations. The integrated rechargeable battery backup guarantees continuous operation when AC power is interrupted, automatically activating to provide reliable emergency lighting exactly when it is needed most.

Backed by a five-year full warranty on the unit and a two-year prorated warranty on the battery, this wet location vandal-proof emergency light offers unmatched reliability, long-lasting performance, and peace of mind.

- * Two fully adjustable, semi-recessed ultra bright, 5 watt MR-16 LED lamp heads standard
- * Dual 120/277 voltage
- * Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- * 6V long life, maintenance-free, sealed lead acid battery
- * Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 180-minute emergency illumination
- * Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- * **Housing:** Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- * Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations

Product Warranty



Applications



Schools



Offices



Commercial
Buildings



Healthcare

Highlights and Certifications



UL Listed



Wet Rated




California
Energy
Compliant

Key Specifications

- * UL Listed
- * Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- * Operating temperature: 68°F – 122°F
- * Five year warranty on all electronics and housing. Battery prorated for two years
- * **Mounting:** Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections

Dimensions

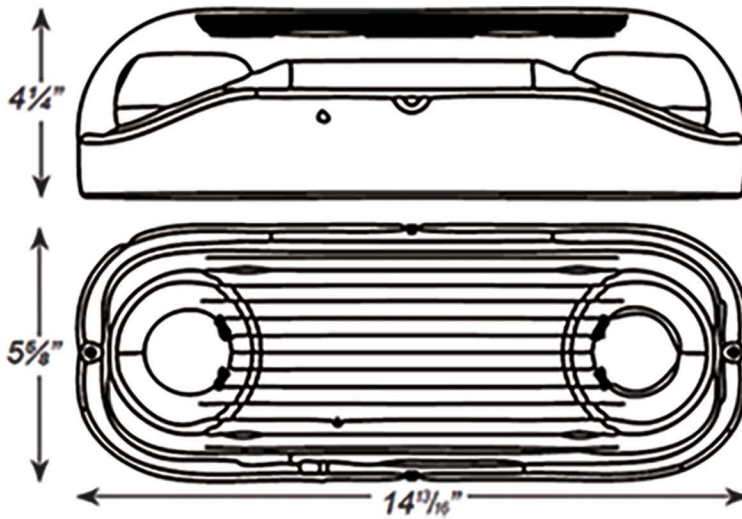

Ordering Guide

PART #	Lumens / watt	Power	Lumens	Voltage	Emergency
EMER-WTL	112	10W	1120	120- 277V	5W for 90 mins