



Certified LED Lights®

Product Data Sheet
Up Down Light

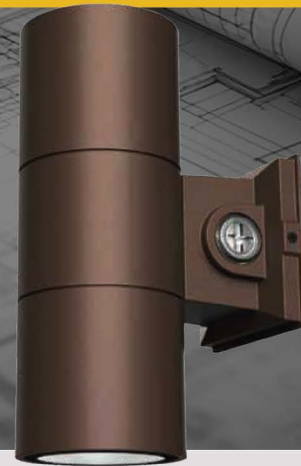


Product Overview

CYL01G outdoor up/down cylinder light is a sleek and modern architectural lighting solution designed to enhance both residential and commercial exteriors with balanced illumination and contemporary style. Featuring selectable color temperatures of 3000K, 4000K, and 5000K, this versatile fixture allows you to tailor the ambiance to suit different environments—whether you want a welcoming glow for a home façade, crisp neutral lighting for pathways and patios, or bright, daylight-like visibility for security-focused areas. This light is 22W, 29W and 35W wattage field selectable. It delivers strong, consistent illumination both upward and downward, creating striking wall-wash effects while improving safety and visibility around entryways, garages, courtyards, and building perimeters. The durable bronze aluminum housing not only provides a clean, minimalist aesthetic that complements modern and industrial architecture, but also ensures excellent heat dissipation and long-term resistance to rust and corrosion in outdoor conditions. Engineered for reliability and performance, this fixture is backed by a 5-year warranty, offering peace of mind and dependable operation in various weather environments. Ideal for architects, contractors, and homeowners seeking a combination of performance, flexibility, and contemporary design, this 35W outdoor up/down cylinder light delivers efficiency, durability, and refined visual impact in one compact, high-quality lighting solution.

Applications



Homes



Perimeter



General area



Pathways

Main Features

- * Color temperature CCT: 3K, 4K, 5K
- * Wattage Selectable: 22W, 29W, 35W
- * 120-277 VAC 60 Hz input voltage
- * UL Listed
- * 58 lm/W
- * 1,276 LU @ 22W - 1,682 LU @ 29W - 2,030 @ 35W
- * Power factor > 0.90
- * Color rendering Index > 80
- * Distribution pattern: 40 degrees
- * 0-10V dimming
- * IP65 rated for wet locations
- * Bronze Aluminum housing and glass lenses
- * Easy installation in new construction and retrofit
- * Total harmonic distortion <20%
- * Integrated dusk-to-dawn photocell

Product Warranty



Highlights and Certifications




UL listed




Wet Location
Rated



FCC Part 15,
class B



Field selectable CCT 3-way dip switch:
3K, 4K, 5K




Field selectable CCT 3-way dip switch:
22W, 29W, 35W


Key Specifications

- * Field selectable color temperature CCT: 3K, 4K, 5K
- * Field Selectable wattage Selectable: 22W, 29W, 35W
- * UL Listed
- * IP65 Wet location rated
- * Complies with FCC part 15, Class B
- * Operating temperature: -40°F - 113°F
- * 5-year warranty of all electronics and housing

Dimensions

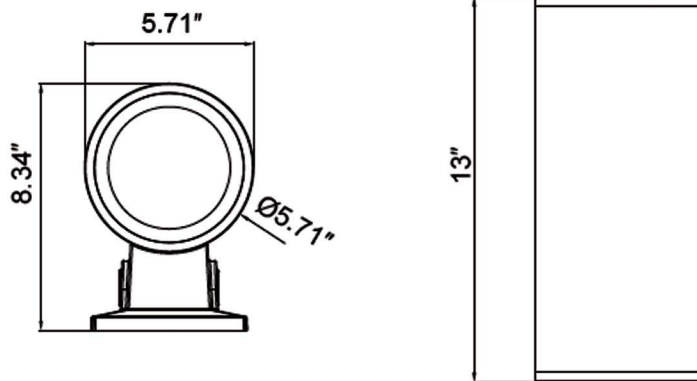


Wiring Diagram

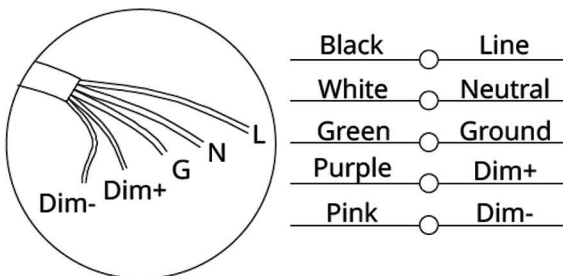

Ordering Guide

Part #	CCT	Wattage Selectable	Lumens / Watt	Total Lumens
CYL01G-35W-3CCT	3K / 4K / 5K	22W, 29W, 35W	58	1,276, 1,682, 2,030

Wattage and Kelvin Selectable Switches

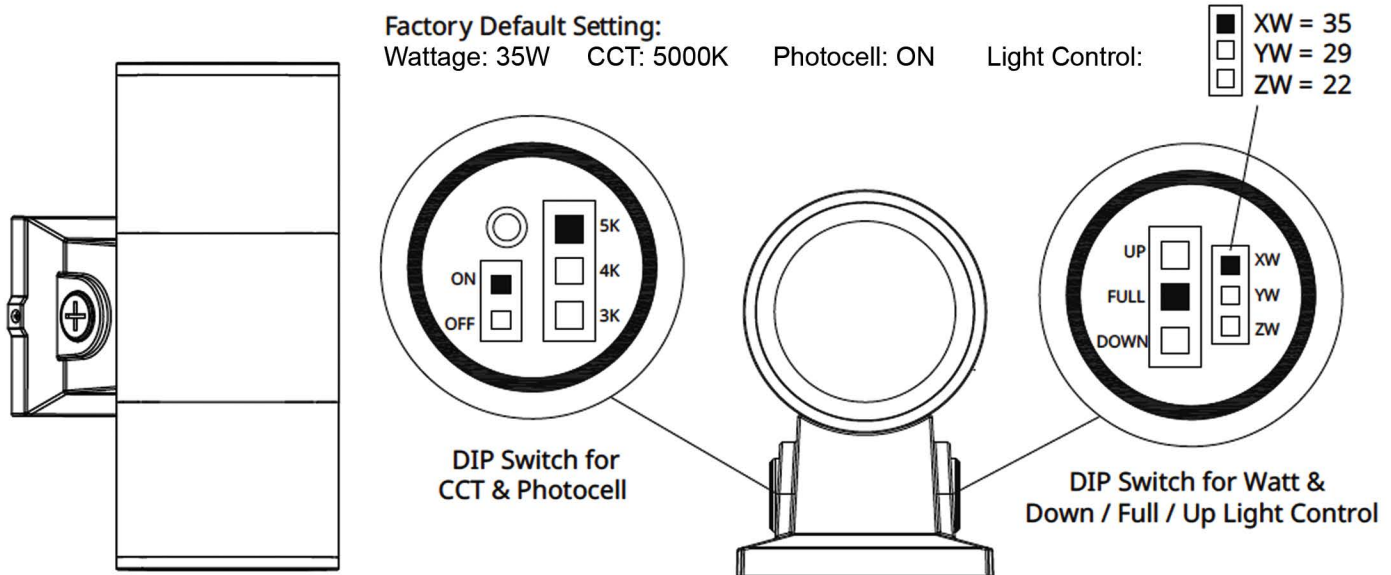

Photometric Data

