



STANDARD




APPLICATIONS

This thin 6" disk surface mount downlight is perfect for both new construction and retrofit applications. The D236D-90-CCT is Kelvin selectable in 27K, 3K, 35K, 4K, 5K and accepts 120V input and is triac dimmable. It is designed to surface mount over a recessed box or has clips to mount over a recessed can.

FEATURES

- * Junction Box Complies to ETL Safety Standard
- * High Lumens Output: 1100
- * Power: 120VAC
- * Triac dimmable
- * Applications: Surface mount
- * Color Temperature: 2700K / 3000K / 3500K / 4000K / 5000K
- * CRI: >90
- * 90 degree beam angle
- * Power Factor: 0.9
- * Lifetime: 50,000 hours
- * Working temperature: -4 F to 140F
- * Easy Installation, labor Cost Saving

MOUNTING

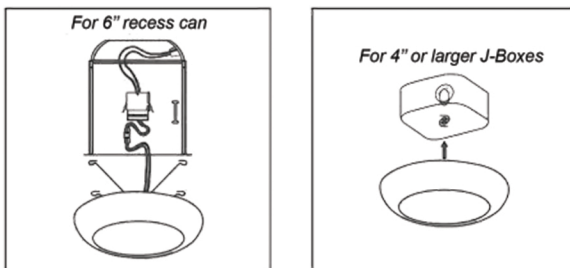

ORDERING INFORMATION

PART	LUMENS	WATTS	LM/W	CCT COLOR TEMPS
CLL-D236D-90-CCT-WH	1,100	15	73	27,30,35,40,50k

Specifications and dimensions subject to change without notice

www.certifiedledlights.com

13375 N. Stemmons Frwy, Ste 300, Farmers Branch, TX 75234

Rev Sept 12th 2022

- 2700K
- 3000K
- 3500K
- 4000K
- 5000K



WARRANTY / LISTING

- * UL Listed
- * Energy Star
- * Five year warranty
- * Suitable for wet locations

CCT SWITCH



DIMENSION

