



STANDARD



APPLICATIONS

This architectural direct/ indirect linear strip light is a decorative commercial grade fixture. It offers both wattage and kelvin selectable with several adjustments to set the direct/ indirect light as needed. Designed to be linkable and support multiple mounting solutions (10ft cable kit with canopy plates is standard). Perfect for offices, retail, and other hospitality spaces.

FEATURES


- * CCT selectable in 3500K, 4000K, 5000K
- * Wattage selectable 30W, 40W, 50W (4Ft) and 50W, 64W, 80W (8Ft)
- * Long-life LEDs provide 100,000 hours of operation
- * 115 lu/W LEDs
- * 0-10V dimming capability
- * Universal 120-277 AC voltage (50-60Hz) is standard
- * Power factor > 0.90
- * Beam angle: 120 degrees
- * Color rendering index > 80
- * Heat rating of 40°C / 104°F
- * Available in white only. White 10ft S.O cord
- * Adjustable direct / indirect flux ration:
direct: 100%, 70%, 50% ; indirect: 0%, 30%, 50%

Adjustable flux ratio



CCT Selectable
3500K, 4000K, 5000K

Wattage Selectable
30W, 40W, 50W (4Ft)
50W, 64W, 80W (8Ft)

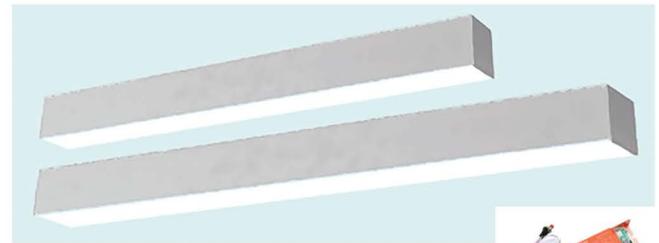


Optional 4ft and 8ft Pre-installed Bilda YT08D EM



WARRANTY & DETAILS

- * UL Listed number E468007
- * DLC listed
- * IP 20 for damp location
- * 5-year warranty


DIMENSIONS

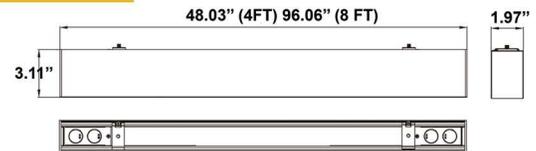

ACCESSORIES (Standard)



ACCESSORIES (optional)

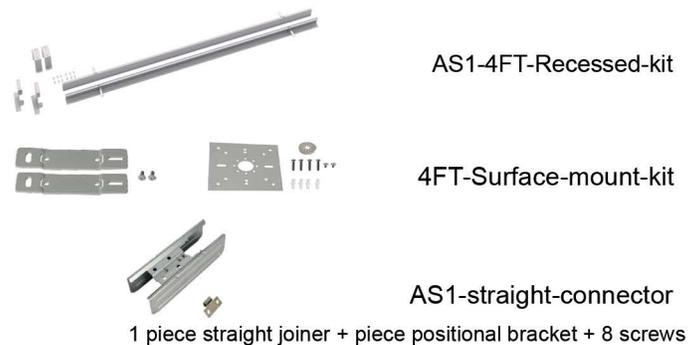

ORDERING INFORMATION

PART #	Size	Color Temp	Lumens	Lumen/watt	Wattage	Voltage
CLL-TS-AS1-4FT50W-L-TCP	4Ft	3.5K, 4K, 5K	3450,4600,5750	115	30/40/50	AC 100-277V
CLL-TS-AS1-4FT50W-L-TCP-EM	4Ft	3.5K, 4K, 5K	3450,4600,5750	115	30/40/50	AC 100-277V
CLL-TS-AS1-8FT80W-L-TCP	8Ft	3.5K, 4K, 5K	5750,7360,9200	115	50/64/80	AC 100-277V
CLL-TS-AS1-8FT80W-L-TCP-EM	8Ft	3.5K, 4K, 5K	5750,7360,9200	115	50/64/80	AC 100-277V

PHOTOMETRIC DATA

