

TAPERED ROUND STEEL POLES



The D-TEC LED tapered round steel poles are built from high strength steel tube and are standard side drilled for arm mount and include a tenon mount. Heights of 20 to 30 feet are available..

Specifications and Features: Conforms to ASTM-A 500 Grade B: Minimum yield strength of 46,000 PSI.

Finish: Textured architectural bronze powder coat finish, baked to ensure maximum paint adhesion, hardness and durability.

Anchor Bolts: Anchor bolts are included.

Hand Hole: Cast iron reinforced hand hole and cover with ground screw.

Base Cover: Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base.

Pole Length: 20, 25 and 30 feet

MOUNTING OPTIONS

SIDE MOUNT: Standard length poles are predrilled (2@180°), with a polycarbonate top cover and hole plugs for unused predrilled locations.

Note: When using Slip-Fitter Mounts, additional installation parts may be required to ensure proper installation.

TOP MOUNT: Round Pole Tenon Adapters (optional) can be installed for a use with a Slip-Fitter or Multi-Fixture installation requiring Bullhorns, Spokes etc.

(3"RND, 4"RND and 5"RND to 2 3/8" Round Tenon Adapters available)


Includes: J-Bolts, set plate, nuts and washers, base cover and top cap

WARRANTY

7-Year warranty

ORDERING INFORMATION

Part #	Height	Wall thickness	Shaft base	Weight (LBS)
TPR20FT6-11G-D	20 Ft	11 Gauge	6" dia	123
TPR25FT6.5-11G-D	25 Ft	11 Gauge	6.5" dia	163
TPR30FT7-7G-D	30 Ft	7 Gauge	7" dia	300

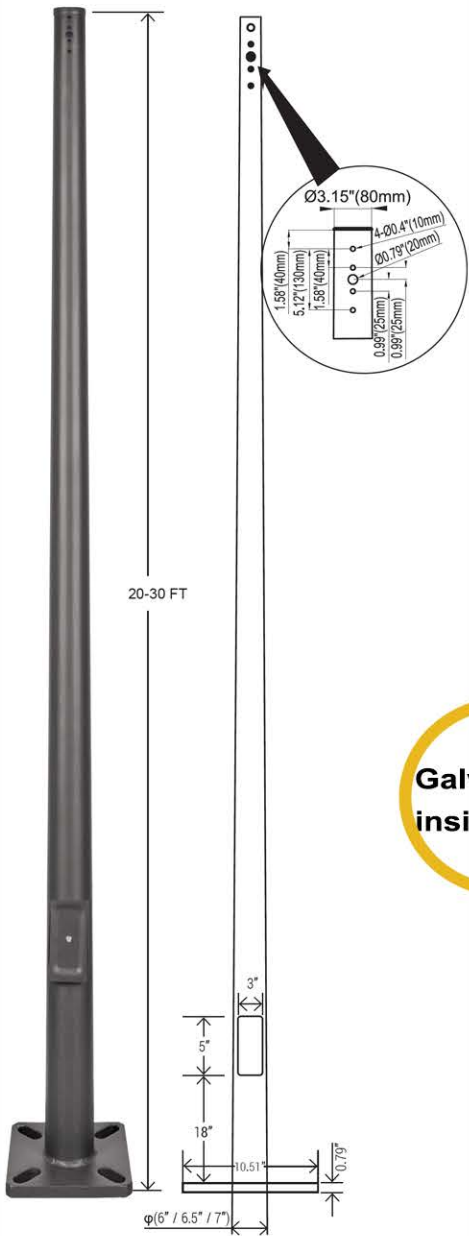


Galvanized
inside + out

TAPERED ROUND STEEL POLES



WIND DATA


Specification type	Bolt size	Pole weight	EPA 70	EPA 80	EPA 90	EPA100	EPA130	EPA 150
TPR20FT6-11G-D	M0.75" x 19.69 x 3.94	123 Lbs	13.9	11.1	10.8	8.8	4.6	2
TPR25FT6.5-11G-D		163 Lbs	12.9	9.9	8.7	7.3	4.2	1.4
TPR30FT7-7G-D	M0.96"x36"x4	300 Lbs	10.5	8.8	7.9	6.5	3.7	1.2

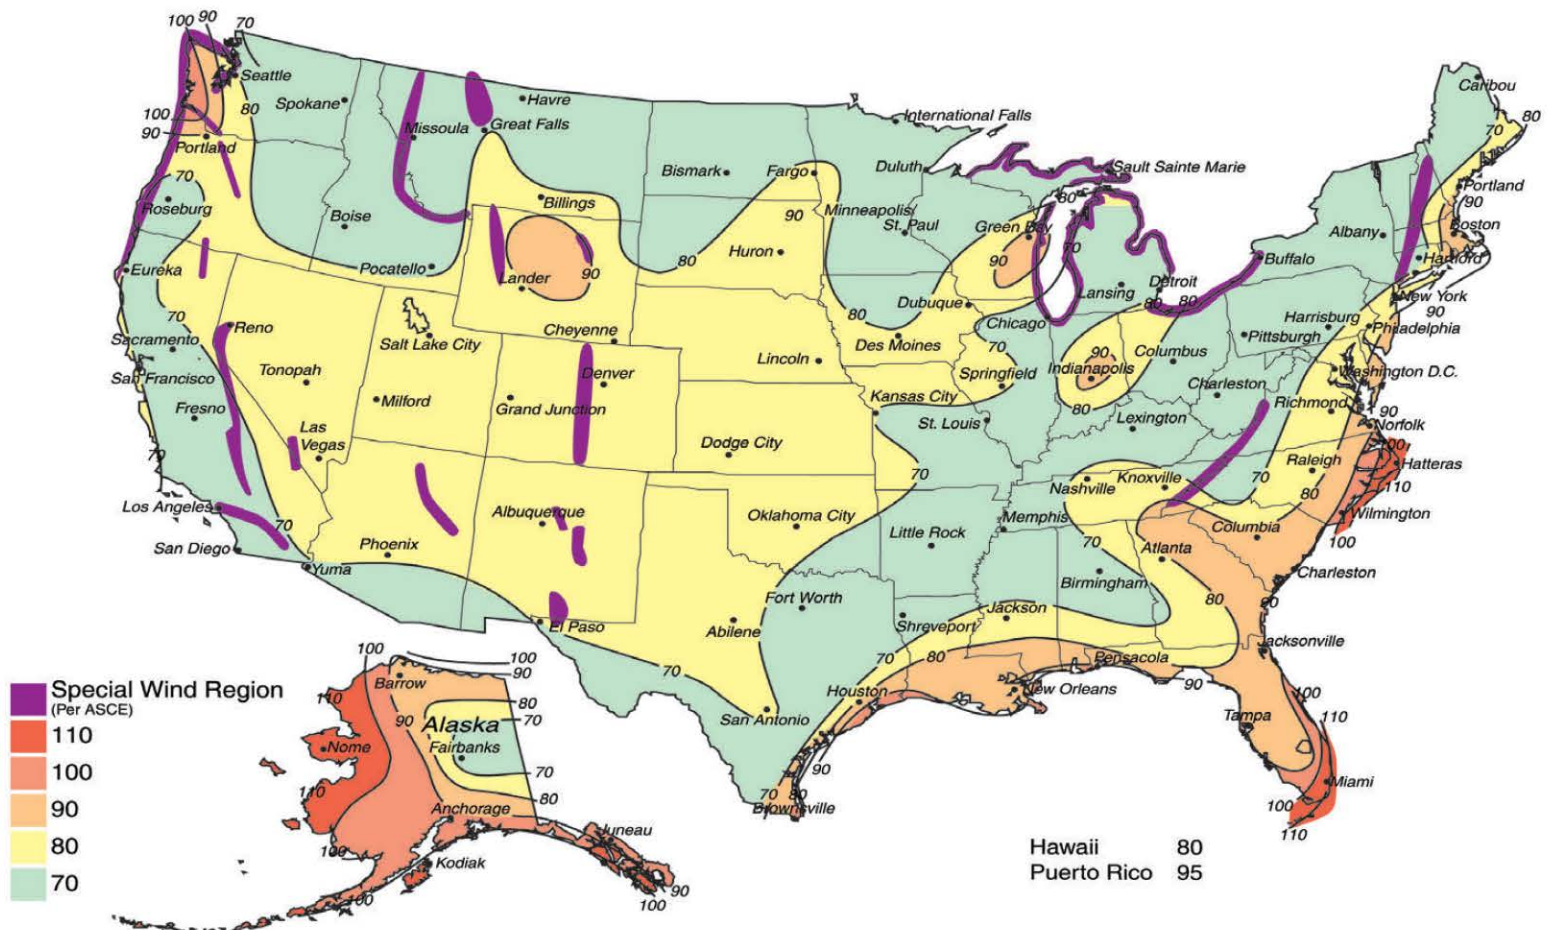




DIMENSION DATA


6" Flange

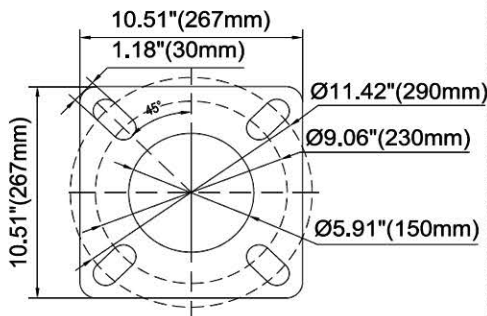


6.5" Flange

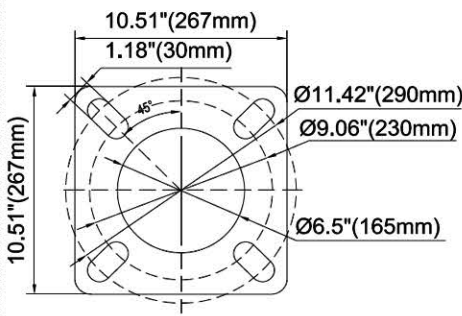


7" Flange

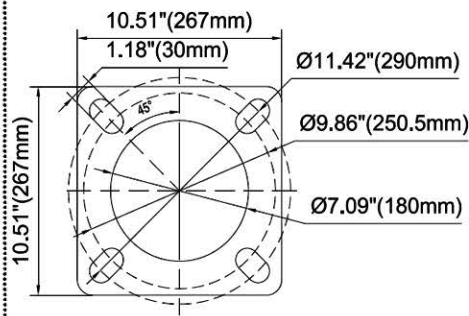

6" Flange Base
Cover Size

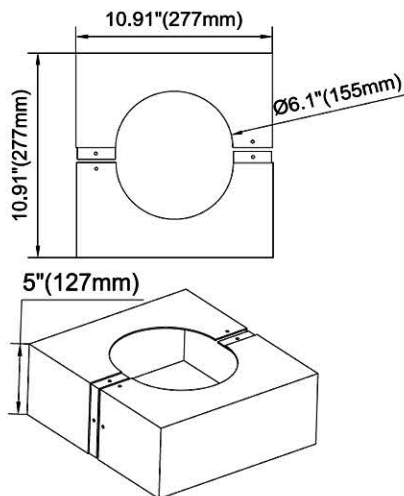

6.5" Flange
Base Cover Size

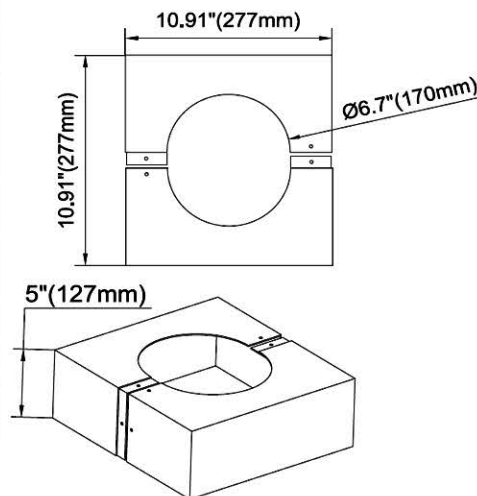

7" Flange Base
Cover Size

