



STANDARD




For use with



Glass pack



* New IP65 proprietary test switch

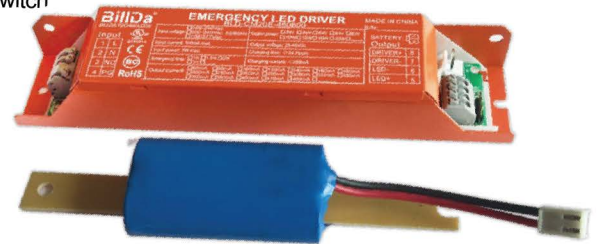

APPLICATIONS

The Bldda BLD-CM20H-20W is a 20W LED emergency driver designed for glass wall pack LED fixtures. Designed to mount inside of the fixture. Rated to provide a minimum of 90 minutes of emergency illumination. Great for Schools, hospital, warehouses.

FEATURES

- * External Life P04 battery - 11.1V / 4000Ah
- * Battery protections: over charge protection, over discharge protection, short circuit protection
- * Indicator shows a variety working modes
- * The batteries meets 500 Cycles of standard CH and standard DCH
- * Universal 100-277V, 50-60 Hz input
- * Test Switch indicator light
- * Output power: 20W ; Output current and voltage: 420-800mA - 25-48 Vdc
- * 90 Minute minimum emergency operating time over full temperature range
- * 24 Hour maximum battery recharge time

HOUSING

- * Durable painted steel construction in orange finish

ORDERING INFORMATION


WARRANTY & DETAILS

- * Five year warranty on all electronics and housing
- * Meets standard CSA C22.2 No 141, UL924, NFPA 101 Life Safety Code, NEC, /OSHA, Local and State Codes
- * UL listed for factory or field installation
- * Suitable for damp locations (32°F - 104°F)

MOUNTING OPTIONS

- * Suitable for installation on top or in remote of the fixture

DIMENSIONS

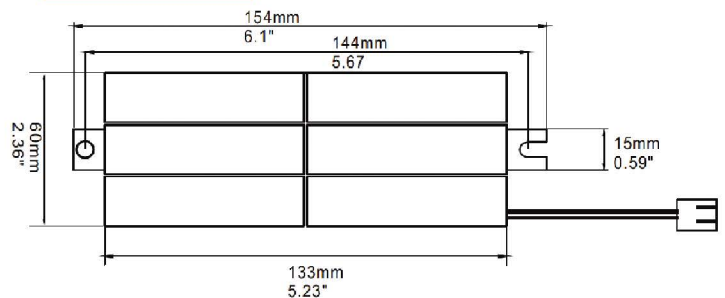

PART #	Output Voltage (VDC)	Output Power(W)	Output current
BLD-CM20H-20W	25-48	20	420-800 mA