

STRAIGHT ROUND STEEL POLES



The D-TEC LED straight round steel poles are built from high strength steel tube and are standard side drilled for arm mount and include a tenon mount. Heights of 10 to 30 feet are available..

Specifications and Features: Conforms to ASTM-A 500 Grade B: Minimum yield strength of 46,000 PSI.

Finish: Textured architectural bronze powder coat finish, baked to ensure maximum paint adhesion, hardness and durability.

Anchor Bolts: Anchor bolts are included.

Hand Hole: Cast iron reinforced hand hole and cover with ground screw.

Base Cover: Poles are provided with a two-piece formed steel base cover that is easily assembled and fitted over pole base.

Pole Length: 10, 15, 20, 25 and 30 feet

MOUNTING OPTIONS

SIDE MOUNT: Standard length poles are predrilled (2@180°), with a polycarbonate top cover and hole plugs for unused predrilled locations.

Note: When using Slip-Fitter Mounts, additional installation parts may be required to ensure proper installation.

TOP MOUNT: Round Pole Tenon Adapters (optional) can be installed for a use with a Slip-Fitter or Multi-Fixture installation requiring Bullhorns, Spokes etc.


(3"RND, 4"RND and 5"RND to 2 3/8" Round Tenon Adapters available)

WARRANTY

7-Year warranty

ORDERING INFORMATION

Specification type	Height	Wall thickness	Shaft base	Weight (LBS)	Bolt size
DTH-R10FT3-11G-D	10 Ft	11 Gauge	3" dia	72	MO.75" x 19.69" x 3.94"
DTH-R15FT4-11G-D	15 Ft	11 Gauge	4" dia	95	
DTH-R20FT4-11G-D	20 Ft	11 Gauge	4" dia	149	
DTH-R25FT4-11G-D	25 Ft	11 Gauge	4" dia	176	
DTH-R30FT5-11G-D	30 Ft	11 Gauge	5" dia	242	MO.75" x 19.69" x 3.94" / MO.95" x 36" x 4"

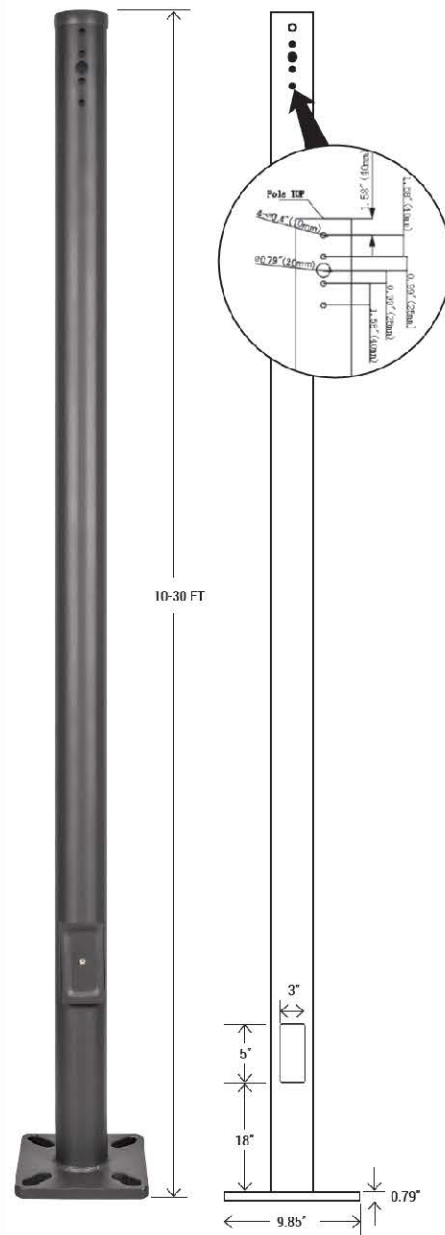


Galvanized
inside + out



DIMENSION DATA


Specification type	Pole weight	EPA 70	EPA 80	EPA 90	EPA100	EPA120
DTH-R10FT3-11G-D	72 Lbs	26.2	22.5	20.1	16.4	9.6
DTH-R15FT4-11G-D	95 Lbs	17.8	14.6	12.3	10.9	6.4
DTH-R20FT4-11G-D	143 Lbs	11.9	9.1	8.8	6.8	3.8
DTH-R25FT4-11G-D	176 Lbs	10.9	7.9	6.7	5.3	3.1
DTH-R30FT5-11G-D	242 Lbs	8.5	6.6	5.7	4.2	2.1

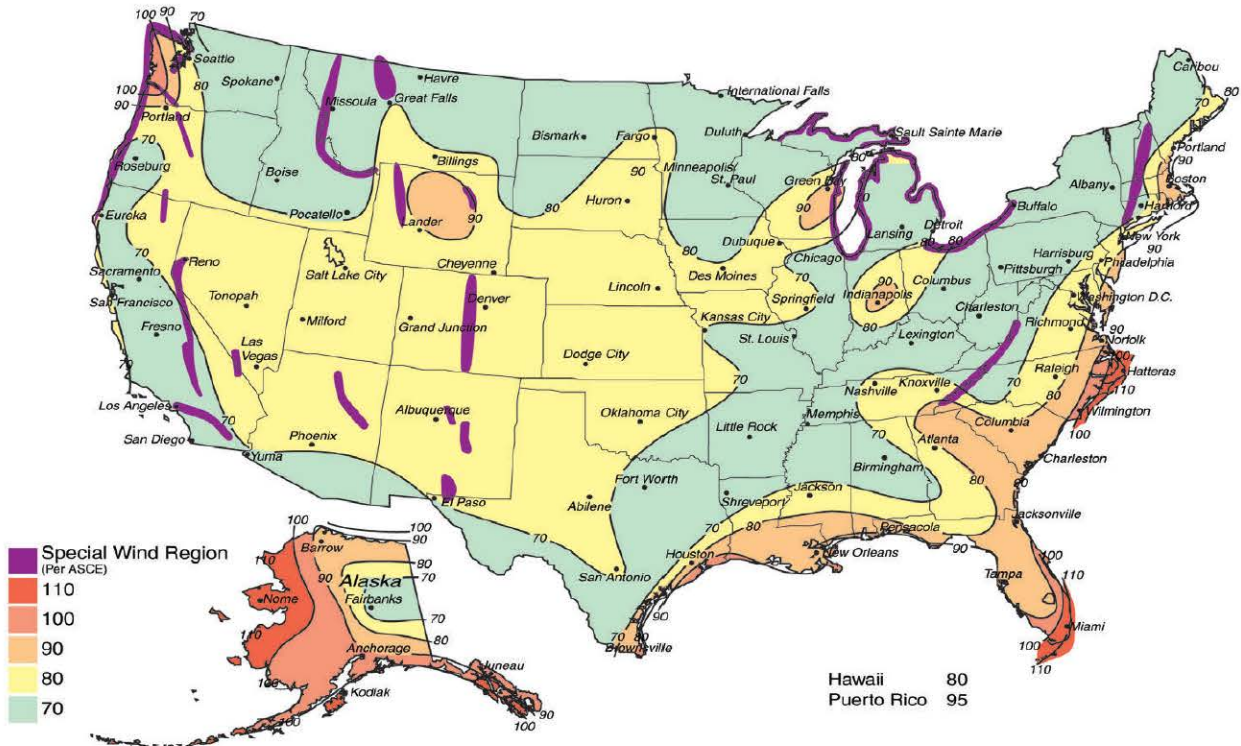




DIMENSIONS


3" Flange

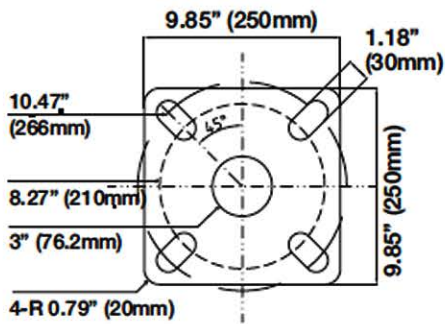


4" Flange

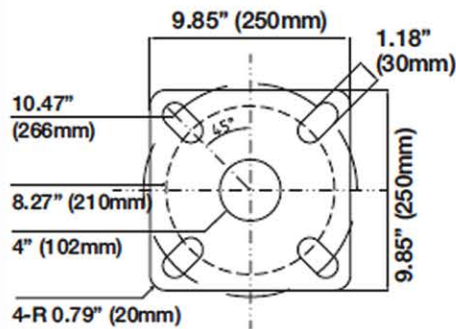


5" Flange

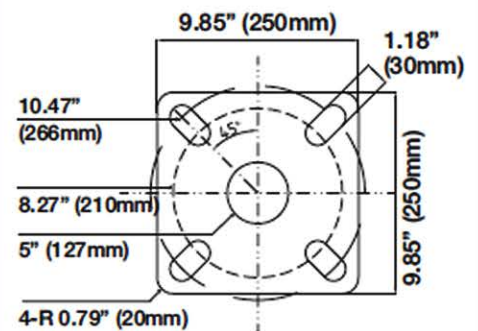

3" Flange Base Cover Size

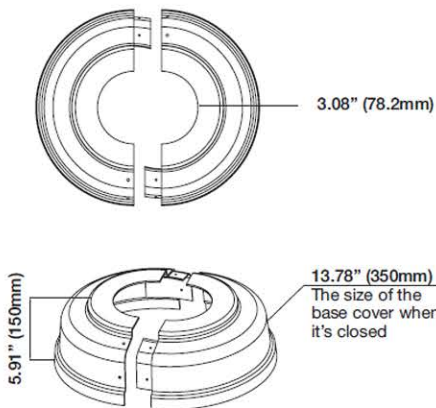

4" Flange Base Cover Size

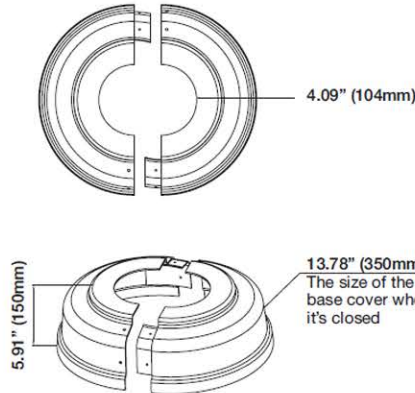

5" Flange Base Cover Size

