



STANDARD



APPLICATIONS

The EXTSGN and the remote control EXTSGN-RC series LED exit sign combines an attractive, easy-to-install, compact, contemporary design with proven, reliable electronics to provide the very best in energy-efficient emergency lighting. These units are completely self-contained, featuring a universal mounting canopy and are standard with universal single / double sided faces.

FEATURES

- * Ultra bright, energy efficient, long life Red or Green LED's
- * Dual 120/277 voltage
- * Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- * 1.2V 700 mAh long life, maintenance-free, rechargeable NiCd battery
- * Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- * Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

MOUNTING

- * EZ-snap mounting canopy included for top or side mount
- * Universal knockout pattern on back plate for wall mount

HOUSING


- * Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish
- * EZ snap-out Chevron directional indicators
- * Compact, low-profile design



WARRANTY / LISTING

- * Five year warranty on all electronics and housing. Battery prorated for five years
- * Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- * UL Listed for damp locations (0°C – 50°C)
- * Certified to CEC under Title 20 Regulations

DIMENSIONS

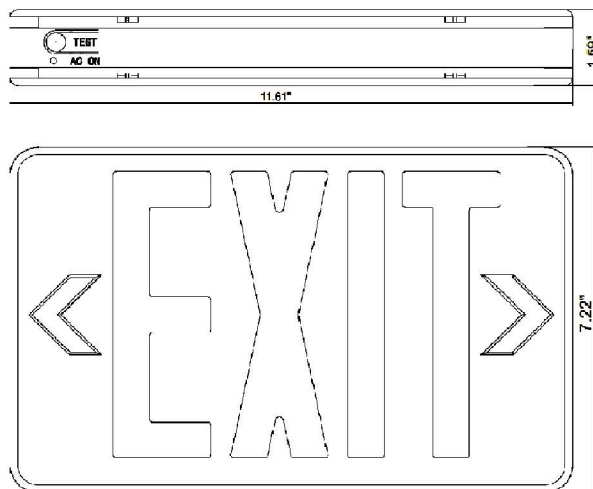

ORDERING INFORMATION

PART #	No of faces		Letter Color		Battery		Feature
DTH-EXTSGN-RED	2	Universal Single/	R	Red	EM	Backup	
DTH-EXTSGN-GRN		Double face	G	Green			
DTH-EXTSGN-RC	2	Double face	R	Red	W	Backup	Remote control