



Certified LED Lights®

Product Data Sheet
Exit Sign Combo VE



Product Overview

The EXTCMB-VE is a value-engineered exit and emergency lighting combo designed to deliver reliable life-safety performance in an ultra-compact, modern form. Its streamlined profile provides a clean, contemporary egress solution that blends seamlessly into a wide range of commercial and institutional interiors without sacrificing functionality. The compact design makes it ideal for space-conscious installations while maintaining clear visibility and code compliance.

Standard features include a versatile canopy mounting plate for easy ceiling, wall, or end mounting, along with adjustable LED twin emergency heads that deliver focused illumination where it's needed most. In the event of a power loss, the EXTCMB-VE provides a minimum of 90 minutes of emergency operation, ensuring safe and dependable egress. Combining affordability, efficiency, and dependable performance, this exit/emergency combo offers a practical solution for everyday life-safety applications. This exit sign comes with 5-yr warranty on all electronics and housing. The battery is prorated for 5 years

- * Long lasting, efficient ultra bright white LED lamp heads
- * 12 SMD 2825 LED per head
- * High performance chrome-plated metallized reflector and plastic lens for optimal light distribution
- * Adjustable LED lamp heads provides optimal center-to-center spacing
- * Long life, energy efficient Red LED EXIT sign illumination
- * Universal 100/277V input
- * Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- * 3.6V 700 m AH long life, maintenance-free, rechargeable NiCd battery
- * Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- * Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

Product Warranty



Applications



Schools



Offices



Commercial
Buildings



Healthcare

Highlights and Certifications



UL Listed



Damp Location




California
Energy
Compliant

Key Specifications

- * UL Listed
- * Damp Location rated
- * Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- * Certified to CEC under Title 20 Regulations
- * Universal J-box mounting pattern
- * Universal knockout pattern on back plate for wall mount
- * Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish
- * Working temperature 32°F – 104°F
- * 5-year warranty on all electronics, housing and battery prorated for 5 years

Dimensions

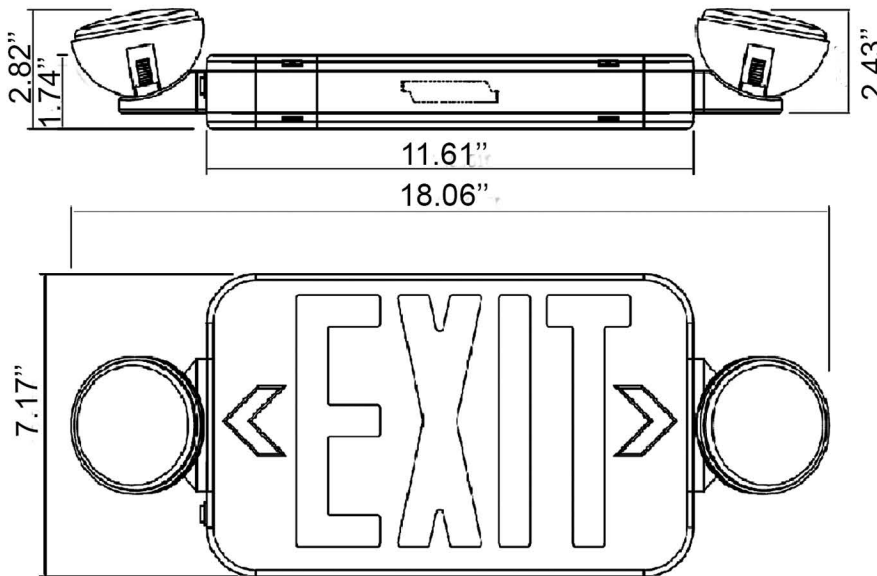

Ordering Guide

PART #	No of faces		Letter Color		Housing Color		Remote control	
EXTCMB-VE	blank=	Single	R	Red	W	White		
EXTCMB-VE-RC	blank=	Single	R	Red	W	White	RC	Up to 3W