



APPLICATIONS

The IP710-LFZ IllumaTech® Slide are designed for both single pole (one location) and 3-way (two location) applications. IllumaTech preset slide controls feature a smooth, captured slide bar for fine adjustment of lighting levels and an easy to use push button that provides preset ON/OFF switching. This 0-10V dimmer is ideal for use with LED fixtures that accept 277V and require 0-10V dimming such as panels and highbays.

FEATURES


- * Provide single pole (one location) or 3-way (two location) lighting control when used with a 3-way switch
- * Built-in radio/TV interference filter
- * Fit easily into a standard wallbox and are suitable for multi-gang installations
- * Fluid slide movement allows fine adjustment of light level with minimal effort
- * Push button switch acts as an air gap switch completely disconnecting power from unit for bulb changing
- * Slide controls travel approximately 20mm
- * IP710-LFZ designed for use with LED fixtures using 0-10V power supplies
- * Dual voltage 120V/277V; 28 mAmps maximum sink current.
- * Action : Standard ON/OFF
- * Series Frequency : 60 Hz
- * Light : None
- * Load Rating : 1200VA
- * 0-10VDC LED Power Supply



WARRANTY & DETAILS

- * UL Listed (File #E-31373)
- * CSA Certified (File #LR-3413)
- * 5-year warranty
- * Operating temperature: 32°F – 131°F
- * Non-operating 55°F – 185°F
- * Relative humidity, non-condensing 20% to 90%
- * No power pack required for switching

DIMENSIONS

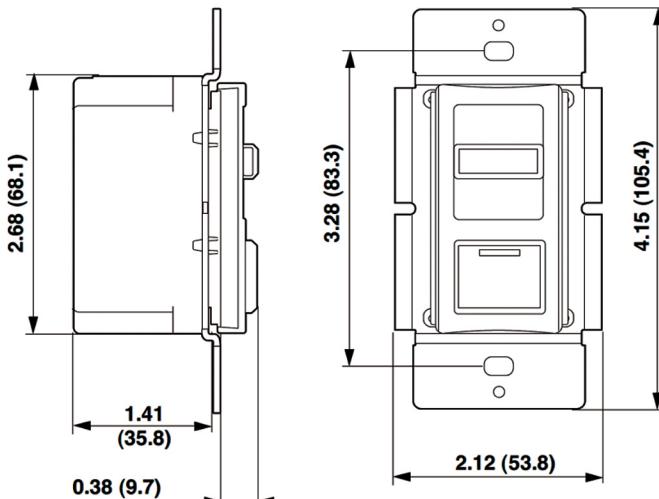

ORDERING INFORMATION

PART #	Dimmable	Switch type	Load rating	Voltage
IP710-LFZ	0-10V	Single pole or 3 way install	1200VA	AC 100-277V